

3FG5682SC1/01-V01
3FG5682SC1/02-V02



FRIO
Frigocongelador

Libro de instrucciones

52 9563

(de,en,fr,es,pt)

1) 16 5458

2) 16 8427

3) 17 4468

4) 17 3711


Verde

5) 17 3712

Ambar

6) 17 3713


Rojo

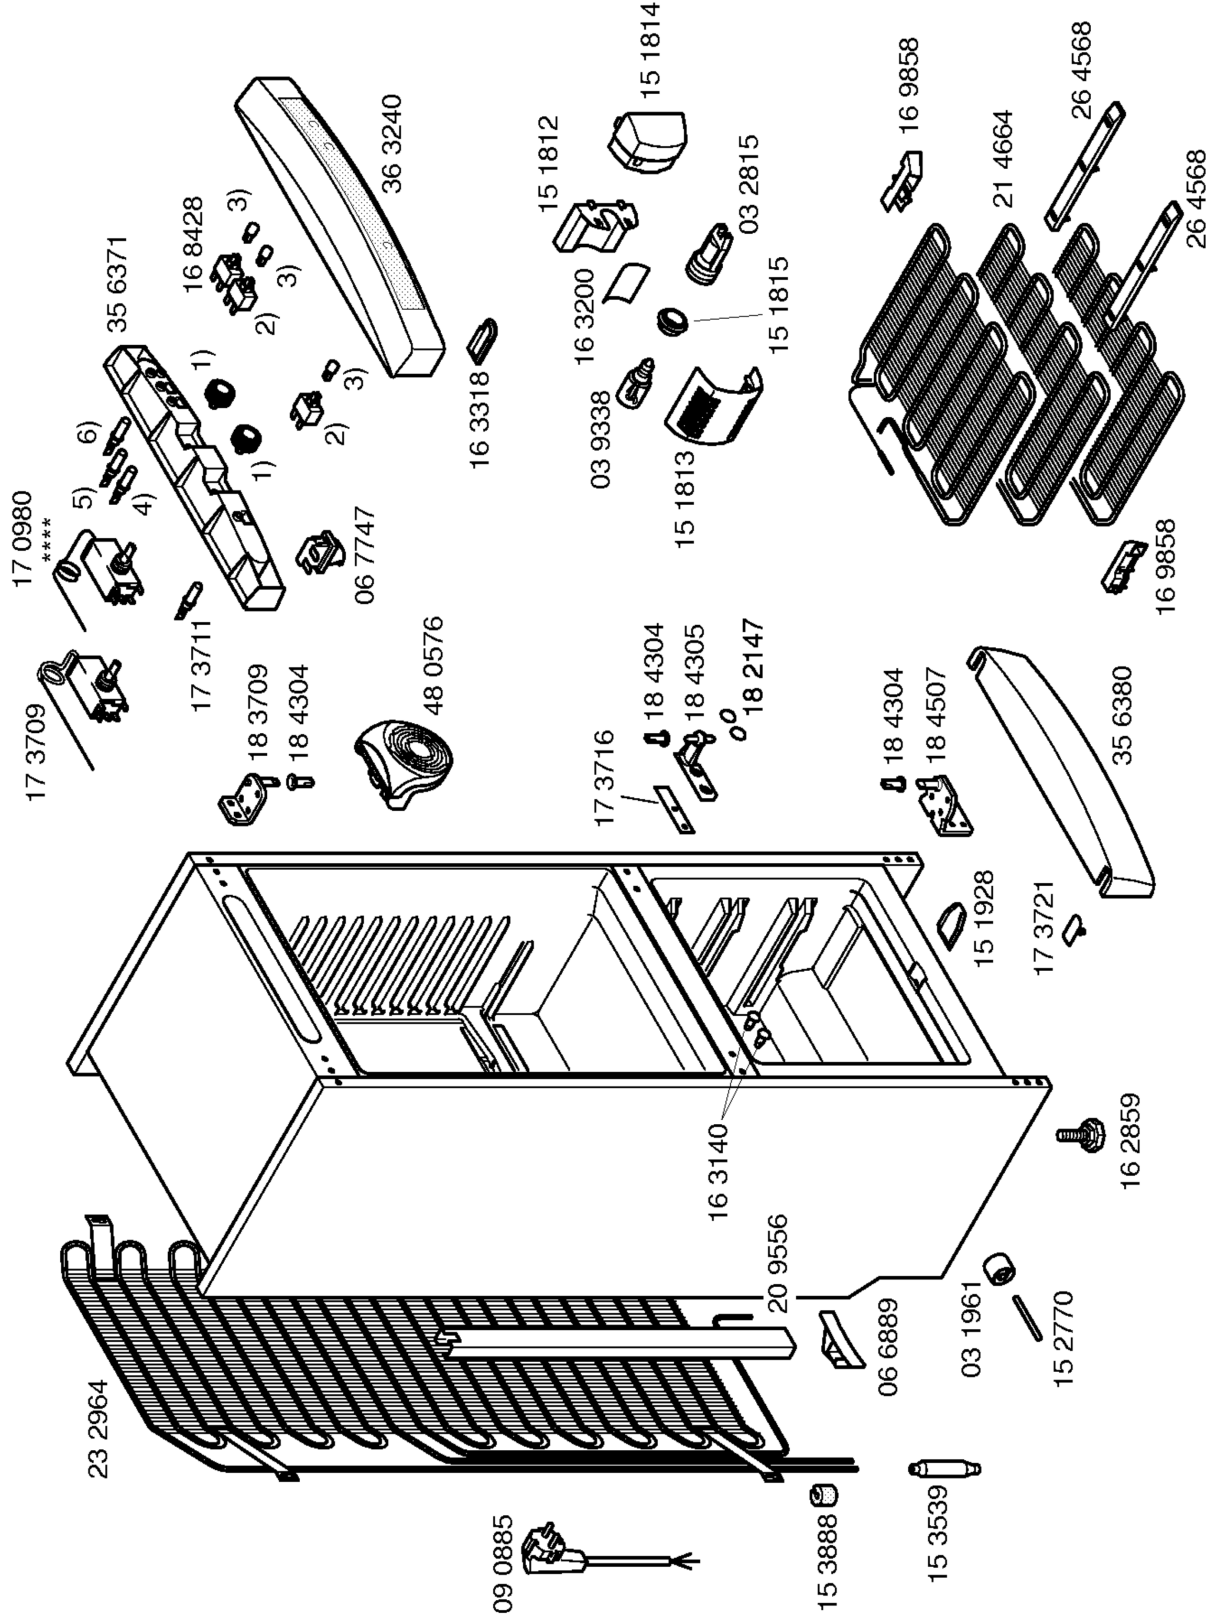

3FG5682SC1/01-V01
3FG5682SC1/02-V02




FRIO
Frigocongelador

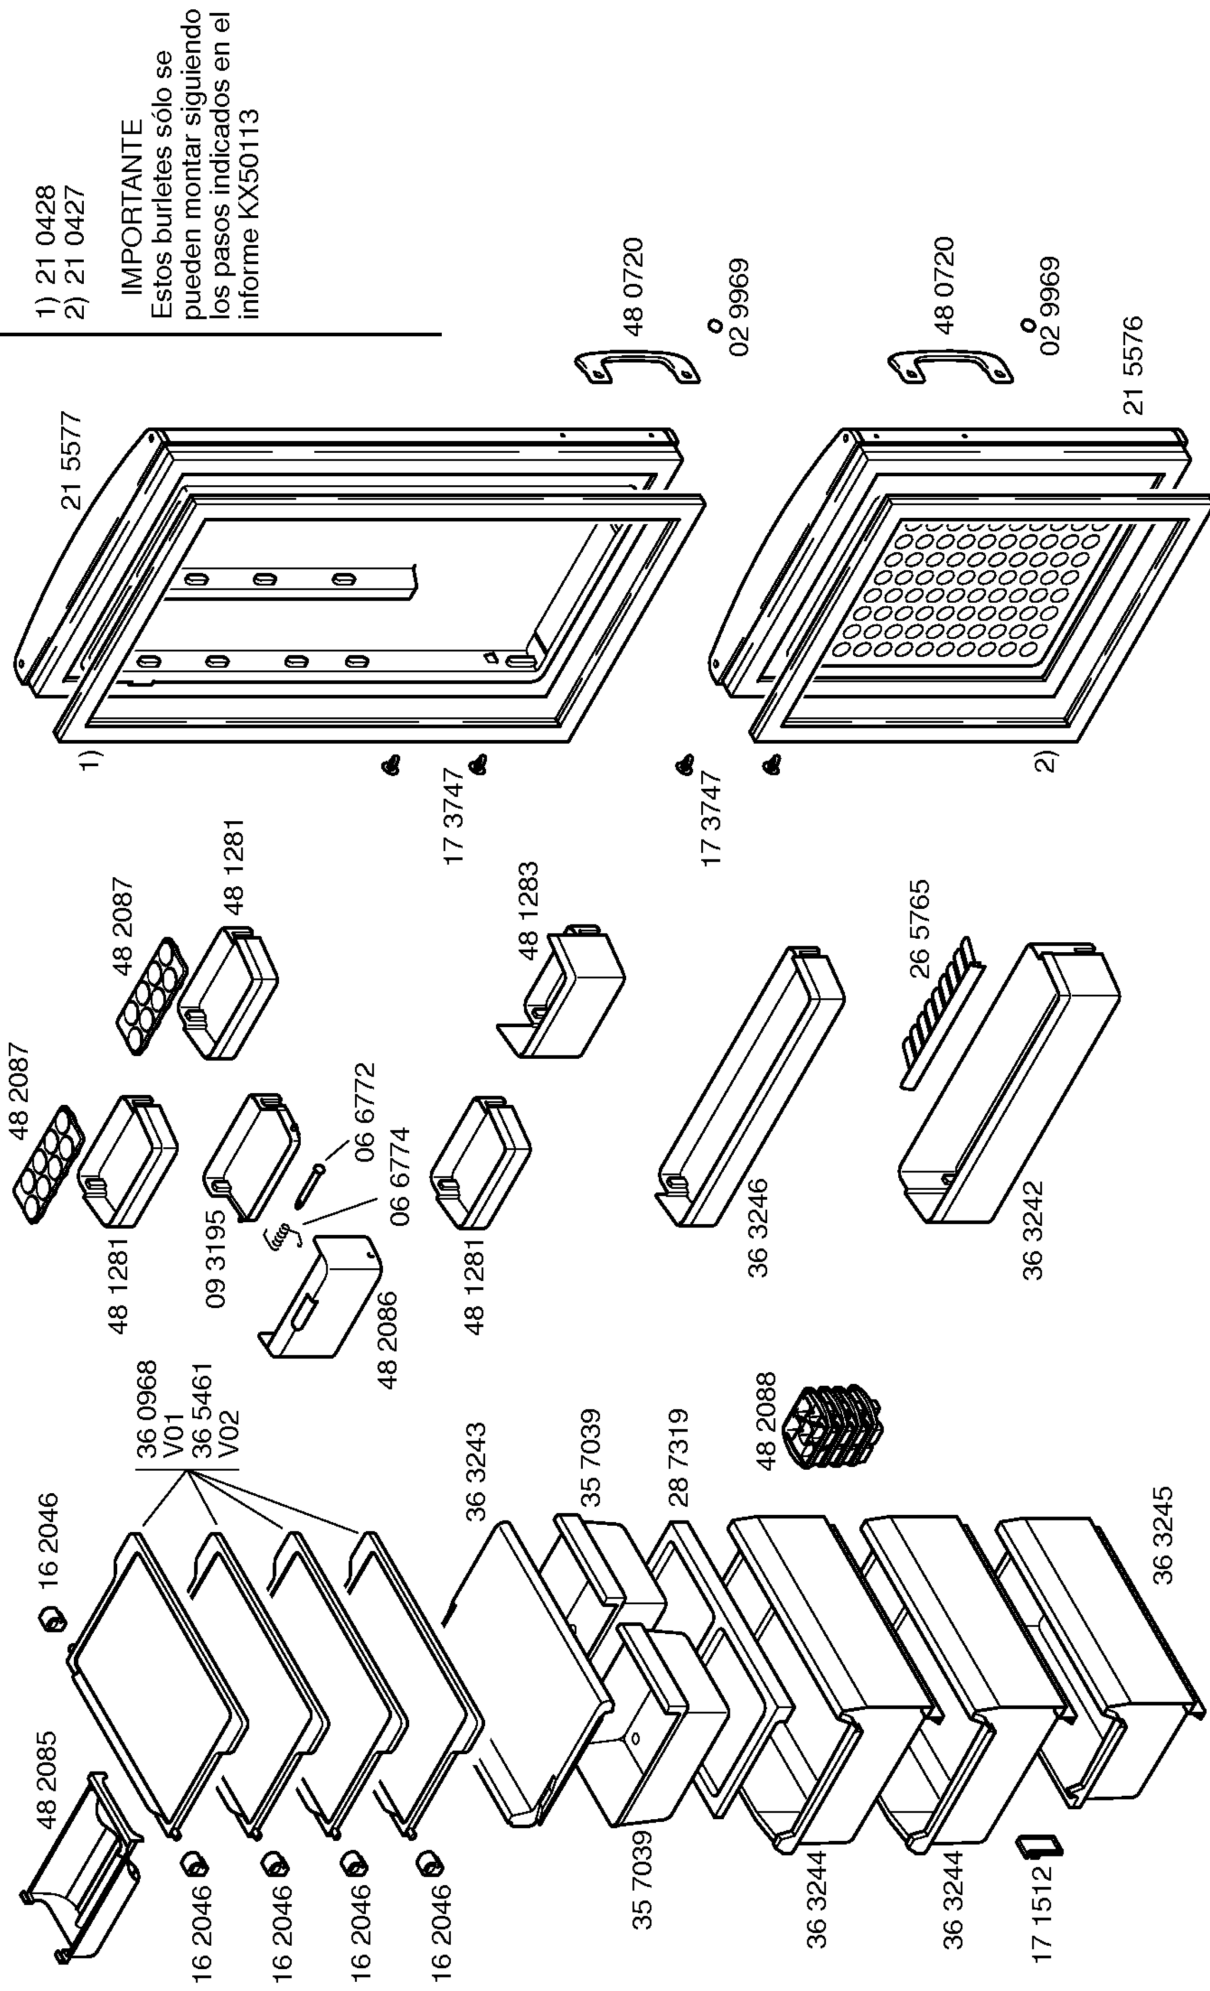

3FG5682SC1/01-V01
3FG5682SC1/02-V02



FRIO
Frigocongelador

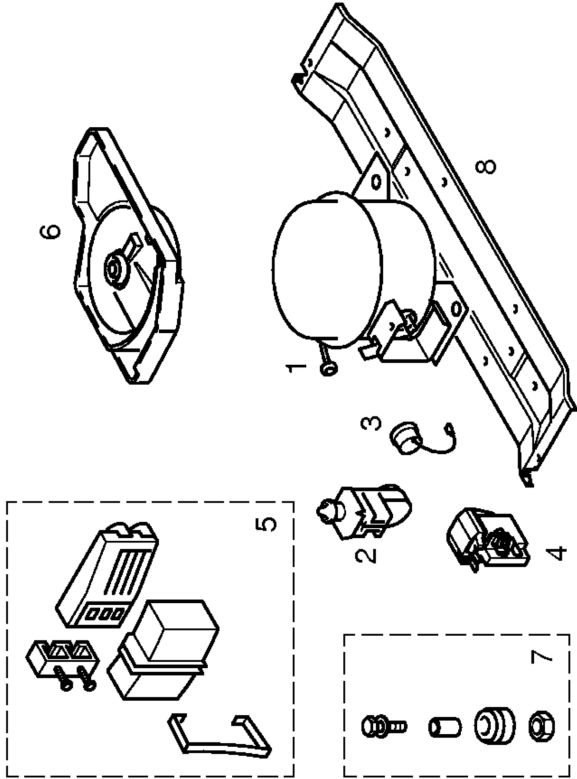

Pos.	Aspera	****		
	BPK1072Y	Gold Star		
	ND69NAEG			
1	14 2000	14 2001		
2	15 4315			
3	17 3748			
4		17 1011		
5				
6	26 4123			
7	05 0166	05 0166		
8	28 8253	28 8253		
9				
10				
11				

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS				

Verdichter/Compressor/Compresseur/Compresor	Aspera	Gold Star		
Typ/Type/Tipo	BPK1072Y	ND69NAEG		
Förderleistung/Delivery/Debit/Aspiración l/h	0,47			
Anlaufstrom/Starting current/Cour démarrage/Int.arranq. A	33,10			
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm	38,20			
Hi/aux.				
Temp. Reyler/Thermostat/Termostato	Danfoss	Ranco		
Typ/Type/Tipo	077B6181	K54-L2006		
Reglerstellung/Position/Conexión	MIN. MAX.	MIN. MAX.		
Schaltwerte/Switching values/	+6º	-14º -22º		
Valeurs de commutation/Desconex.	-11º -28º	-20º -28º		
(..abtaven' od)		-10º -18º		
Füllmenge/Fill. quantitiy/Charge/Carga R600a	g	*		
Anschlusswert/Comm. load/Puiss. Connect./Potenc.	W	79	83	
Heizung/Heater/Chauflage/Resistenc. descong.				
Widerstand/Resistance/Resistencia	Ohm			
Leistung/Power/Puissance/Potencia	W			
Ventilador/Blower/Ventilateur/Ventilador				
Widerstand/Resistance/Resistencia	Ohm			
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula				
Widerstand/Resistance/Resistencia	Ohm			
Spannung/Voltage/Tension/Tensión	V			
Temp. Reyler/Thermostat/Termostato ambiente para ventilador refrigerador				

* Siehe Typenschild / See identification plate / Voir plaque de caractéristiques / Ver plaqueta de características

