

WSAM 85

SAMSUNG

SERVICE MANUAL

RE-1280 / RE-1270

3 SBE-1

COMBI MICROWAVE OVEN (1.2 cu.ft.)


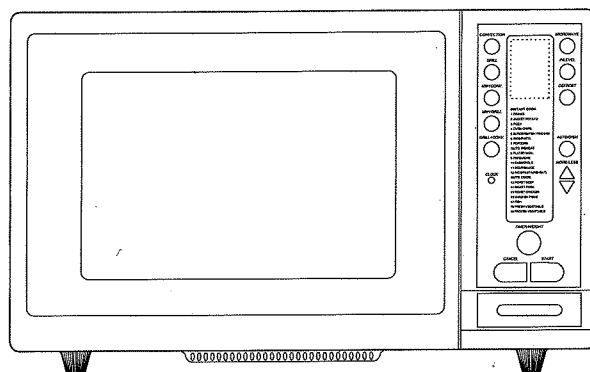


TABLE OF CONTENTS

PRECAUTIONS & SPECIFICATIONS	INSIDE FRONT COVER
COMPARING CHART & CONTROL PANEL	1
OPERATION INSTRUCTION	2
SCHEMATIC & WIRING DIAGRAM	9
CAUTIONS OBSERVED WHEN SERVICING	14
DISASSEMBLY & ASSEMBLY	15
COMPONENT TEST PROCEDURE	17
MEASUREMENTS & ADJUSTMENTS	18
LEAKAGE MEASURING PROCEDURE	19
TROUBLESHOOTING	20
EXPLODED VIEW & PARTS LIST	22
PCB PARTS LIST & CIRCUIT DIAGRAM	29

Exploded View - Cavity Parts

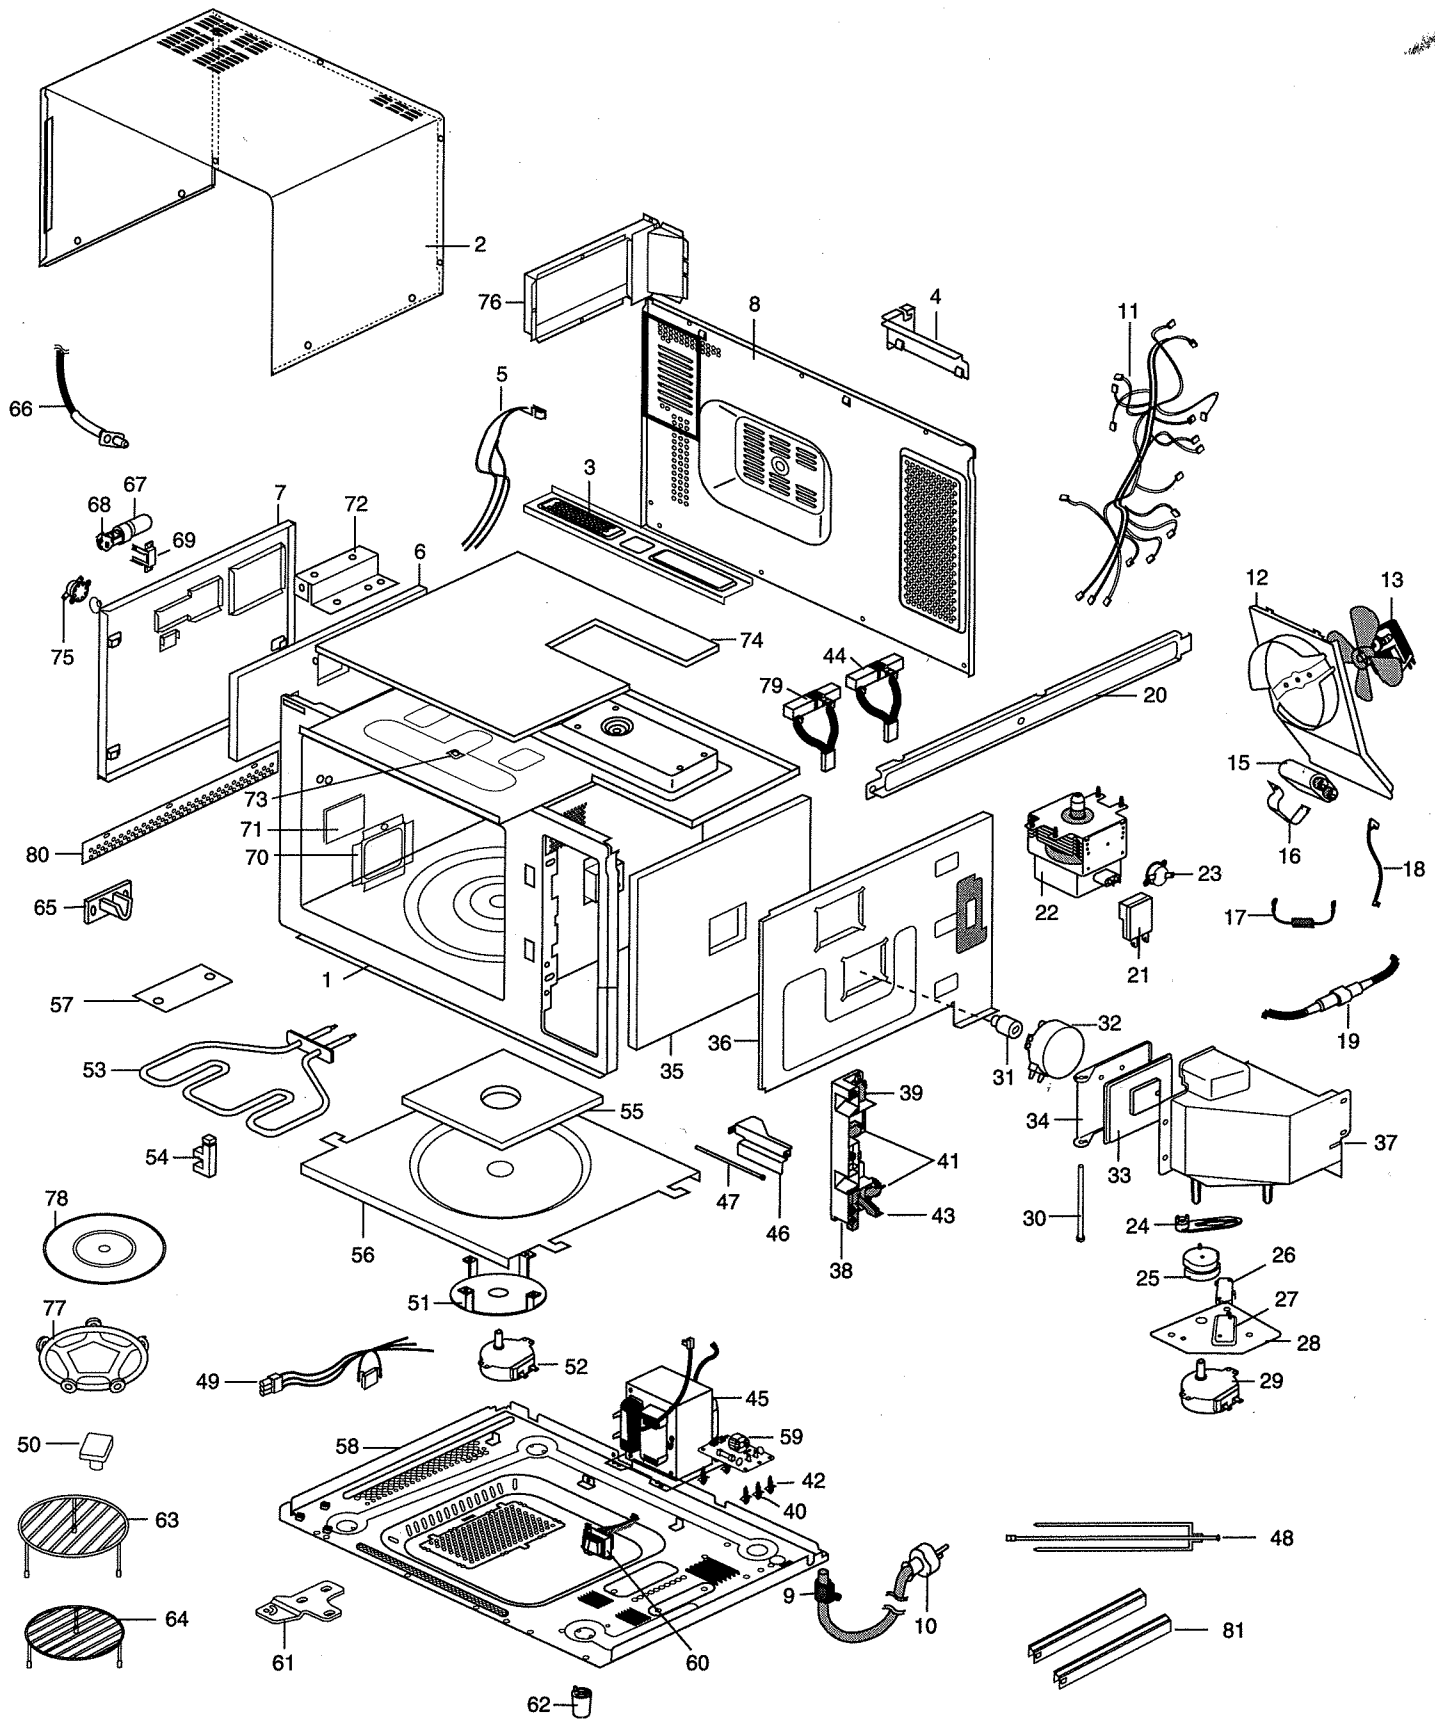

Parts List - Main Parts

Ref. No.	Parts No.	Description / Specification	Q'ty	Remark
1		ASSY CAVITY(COATING);RE-909CG	1	S.N.A.
2	76401-228-310	PANEL OUTER;SC-WH-01-B (RE-909CG)	1	
3	76613-234-910	SUPPORT BACK;SECC T0.6	1	
4	76613-240-920	ASSY-COVER AIR(B);RE-1200/1280/1270	1	
5	79203-0335-00	ASSY WIRE HARNESS-B;230V RE-1280(SAW) AMFO	1	
6	70243-0002-00	ADIABATIC-L;T15 W351 L136 EGF-E3019-PBS	1	
7	76052-216-410	COVER ADIABATIC"L";SBHG1-M T0.5	1	
8	79361-0409-00	ASSY-BACK PANEL;RE-1280	1	
9	76639-202-311	BUSHING CORD;IC002	1	
10	73059-861-306	POWER CORD ; H05VVF 3G 1.5(1410)	1	
11	79202-0334-00	ASSY WIRE HARNESS-A;230V RE-1280(SAW) AMFO	1	
11	79202-0337-00	ASSY WIRE HARNESS-A;230V RE-1270(SAW) AMFO	1	
12	79292-214-210	ASSY COVER BLOWER;RE-909CG	1	
13	74762-203-310	MOTOR-FAN;AMM90-004ATEB	1	
15	71563-200-110	H.V.CAPACITOR ;SCH-2121134B1	1	
16	76614-259-310	BKT-H.V.C;SECC T0.6	1	
17	72169-219-108	H.V.DIODE;HVR-1X-32B-12	1	
18	79223-0001-00	ASSY WIRE LEAD-B;L540 2GA2	1	
19	79163-0138-00	ASSY-H.V.FUSE;MX245 THV060T-0800-H	1	
20	76613-234-710	SUPPORT M.G.T;SECC T0.8	1	
21	79199-204-248	M C CHOKE COIL;TC 101	1	
22	77059-0014-00	MAGNETRON;OM75P(10)ESS	1	
23	73589-001-042	SWITCH-THERMO;PW2N(160/60)	1	
24	75253-207-110	LEVER DAMPER;POM-KEP 44G	1	
25	71583-0001-00	CAM;POM(KEP F20-02) RE-909CG	1	
26	73579-203-265	MICRO SWITCH;VP331A-OD(PT2)	1	
27	73934-209-910	SHEET-INSK K;POLYESTER T0.5X45X24	1	
28	76613-235-410	BKT DAMPER MOTOR;SECC T0.8	1	
29	74769-221-690	MOTOR-SYNCHRONOUS;M2LB49ZR02 (DAMPER-MOTOR)	1	
30	77364-241-910	PIN PLATE DAMPER;MSWR 3	1	
31	76464-223-310	BARBECUE COUPLER;AL	1	RE-1280 only
32	74769-221-708	MOTOR-SYNCHRONOUS;MULJ24ZR03 (SPIT-MOTOR)	1	RE-1280 only
33	76463-218-210	SILICON DAMPER;SILICONE	1	
34	76613-234-810	DAMPER PLATE;SECC T0.6	1	
35	70243-0003-00	ADIABATIC-R;T10 W346 L282 EGF-E3019-PBS	1	
36	76052-216-310	COVER ADIABATIC"R";SBHG1-M T0.5	1	
37	75402-202-110	DAMPER COVER;NYLON#66-2411GF 143.7G	1	
38	76462-212-610	BODY LATCH;RESIN NYLON#66 2411GF6 HB NTR	1	
39	73579-203-278	MICRO SWITCH;VP-531A-OF(T85)	1	
40	76659-200-516	PCB-SUPPORT;DACN-6N	1	
41	73579-203-207	MICRO S/W;VP533A-OF P,S(T85)	2	
42	76659-200-518	PCB SUPPORTOR;DASS-T9N	4	
43	76463-216-810	LEVER SLIDER "B";RESIN NYLON#66	1	
44	79269-0201-00	ASSY-RESISTOR;RE-1280(SAW) 10W 30-J	1	
45	77202-0045-00	TRANS-H.V;Y247STC MX247 230V 50HZ AC2260V/3.3V	1	
46	76613-235-810	BKT DOOR LEVER;SECC T1.5	1	
47	77364-241-910	PIN PLATE DAMPER;MSWR 3	1	
48	77363-201-110	SHAFT BARBECUE;RE-909CG	1	RE-1280 only
49	79194-228-610	ASSY WIRE HARNESS-C;RE-909CG	1	
50	75143-200-510	COUPLER;SILICON KMC401	1	
51	76613-239-710	BKT COVER MOTOR;SECC T0.8 RE-909CG	1	
52	74769-221-606	MOTOR-SYNCHRONOUS;MVLB51ZR11 220V/240V 50HZ (D/M)	1	
53	76402-0007-00	HEATER-GRILL;D7 230V5.6A 1300W RE-1250	1	
54	76654-226-220	SUPPORTER-HEATER;ALUMINA N92	1	

* S.N.A. : SERVICE NOT AVAILABLE


Exploded View & Parts List - Main Parts

Ref. No.	Parts No.	Description / Specification	Q'ty	Remark
55	70243-0004-00	ADIABATIC-LOW;T10 W180 L180 EGF-E3019-PBS	1	RE-1280 only
56	76052-216-210	COVER ADIABATIC "LOW";SBHG1-M T0.5	1	
57	76474-204-210	CEILING PLATE;MICA SHEET T0.5	1	
58	76401-229-610	BASE PLATE;SBHG1-R T1.0	1	
59	79193-231-110	ASSY NOISE FILTER;RE-1200(SKW)	1	
60	77202-0062-00	TRANS-L.V;DY-1280STC RE-1280 230V 50HZ AC14V/3V	1	
61	76664-233-510	HINGE LOWER;SBC1 T3.0(DACRON)	1	
62	76073-201-210	FOOT;DASF-330(RE-909CG)	4	
63	78352-201-570	RACK-WIRE(H);MSWR 155MM PI4	1	
64	78352-201-560	RACK-WIRE(L);MSWR 55MM PI3	1	
65	76464-223-630	BARBECUE HOLDER;PTFE 9G	1	
66	72189-606-013	THERMISTOR;PT-312-K2	1	
67	B4158-0023	LAMP;230V 25W ORG E14	1	
68	76609-200-228	LAMP SOCKET;E/14(22.225)	1	
69	76613-236-510	BKT LAMP;SECC T0.8	1	
70	76154-209-010	LAMP COVER "F";STS304 T0.4	1	
71	76144-201-910	GLASS PLATE;TEMPERRED GLASS T3.2	1	
72	76614-277-010	BKT HINGE UPPER;SBHG1-A T1.2	1	
73	76674-232-810	PLATE-SPRING;SK-5 T0.5	1	
74	73963-232-620	ADIABATIC"U";T6 W379 L353.8 CERAMIC WOOL	1	
75	73589-001-039	SWITCH-THERMO;PW-2N(BKT;23.8MM,ON60'C,OFF160'C)	1	
76	79292-213-620	ASSY GUIDE AIR;RE-1280/1270	1	
77	79199-205-510	ASSY ROLLER BASE;RE-909CG	1	
78	76112-209-010	TRAY CERAMIC;RE-909CG	1	
79	79099-202-038	ASSY-BKT RESISTOR;FX175Z-D	1	
80	76613-241-710	BKT PLATE;SECC T0.6	1	
81	76113-202-820	HANDLE BARBECUE;TEMPERED SPRAY(BLK)	2	RE-1280 only

Parts List - Standard Parts


Parts No.	Description / Specification	Q'ty	Remarks
77108-530-061	SCREW-TAP,PH;2S-3X6 FE,FZY	2	TCO-MG
77128-240-125	SCREW-TAP,TH;2-4X12 FE,FN	4	OUT-PN
77128-540-081	SCREW-TAP;2-SLOT 4X8 FE.FZY	4	B/GE-M
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	2	B/PLAT
77154-203-810	SCREW A;2S-4X12(TOOTHED)	9	BACK-P
77224-209-210	NUT-FLANGE;MSWR10 M5XP0.8 FE FZY	4	MGT
70504-0002-00	SCREW-ASSY TAP TITE;TH + 3 M4 L10 SWR10 ZPC2 TOOTH	1	N/FILT
77108-540-081	SCREW-TAP,PH;+2S-4X8 FE FZY	2	TCO-GR
77128-240-086	SCREW-TAP,TH;2-4X8 STS	4	PL-CEI
77128-240-086	SCREW-TAP,TH;2-4X8 STS	2	G/LAMP
77128-240-125	SCREW-TAP,TH;2-4X12 FE,FN	1	FR-PNL
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	4	B/HING
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	1	FR-PNL
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	4	DAMPER
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	10	BASE-P
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	9	CASING
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	1	SUP-MG
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	2	B/LAMP
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	2	AIR-GU
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	2	CV/A/R
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	1	C/AI/B
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	1	BACK-S
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	1	A-D-L
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	4	CV/D-M
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	1	B/HVC
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	1	CVR/BL
77154-203-810	SCREW A;2S-4X12(TOOTHED)	2	CVR-BL
77154-203-810	SCREW A;2S-4X12(TOOTHED)	2	BD-LAT
77154-203-810	SCREW A;2S-4X12(TOOTHED)	5	OUT-PN
77154-203-810	SCREW A;2S-4X12(TOOTHED)	2	SUP-MG
77154-203-810	SCREW A;2S-4X12(TOOTHED)	1	H.V.D
77224-209-610	NUT-FLANGE;MSWR10 M4	2	BAR-HL
77224-209-610	NUT-FLANGE;MSWR10 M4	2	CONV-H
77224-209-610	NUT-FLANGE;MSWR10 M4	2	GRIL-H
77224-209-610	NUT-FLANGE;MSWR10 M4	1	SENSOR
77328-204-001	WASHER TOOTHED;B-4PI FE FZY	1	BLOWER
70504-0008-00	SCREW-ASSY MACHINE;TH 4 L10 STS430	1	SENSOR
77028-140-086	SCREW-TH;+M4X8 STS304	2	BAR-HL
77108-540-101	SCREW-TAP PH;5-4X10 FE FZY	2	BAR-MO
77128-540-101	SCREW TAP TH;2S-4*10 FR FZY	2	B/HTR
77154-202-910	WASHER SCREW;2S-5X12	4	HVT
77154-203-810	SCREW A;2S-4X12(TOOTHED)	2	B/REST
77168-530-081	SCREW TAP PH;PLAIN 2S-3X8 FE.FZY	13	A/PCB
77108-530-061	SCREW-TAP,PH;2S-3X6 FE,FZY	6	DOOR/E
70504-0002-00	SCREW-ASSY TAP TITE;TH + 3 M4 L10 SWR10 ZPC2 TOOTH	1	P/EART
77128-540-161	SCREW-TAP TH;2-SLOT-4X16 FE FZY	4	FOOT
77154-203-810	SCREW A;2S-4X12(TOOTHED)	2	LVT
77154-203-810	SCREW A;2S-4X12(TOOTHED)	2	COV/B
77328-204-001	WASHER TOOTHED;B-4PI FE FZY	4	FOOT

Exploded View & Parts List - Door Parts

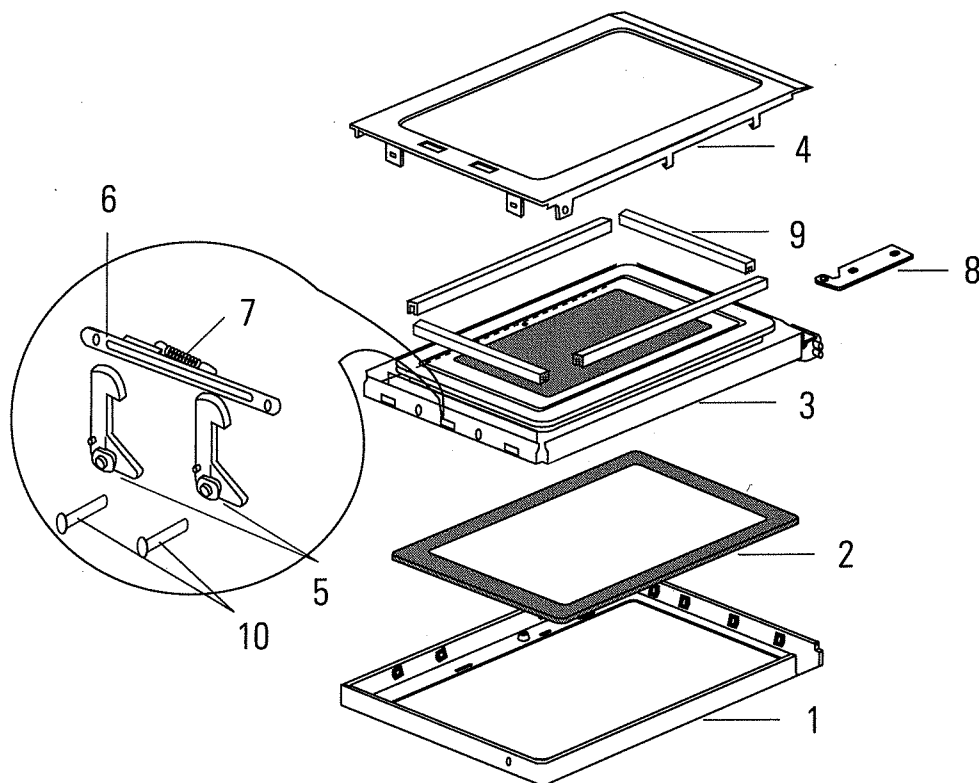


Ref. No.	Parts No.	Description / Specification	Q'ty	Remark
1	74041-0044-00	DOOR-A;PC(LEXAN#141) RP-WH-01-K 310G RE-1280	1	
2	74112-0024-00	SCREEN-DOOR(B);TEMP GLASS T3.2XW313XL435 WHT	1	
3	79291-219-510	ASSY DOOR E;SILICON BONDING	1	
4	76021-203-710	DOOR C;PBT-1500G 158G	1	
5	76464-221-910	KEY DOOR;NYLON#66-2411GF 5.1G	2	
6	79294-204-111	ASSY BKT SLIDER;RE-909CG	1	
7	76674-232-030	KEY-SPRING;ES HSWR PI1.2 D5.8 L47	1	
8	76414-212-710	ASSY HINGE UPPER;SBC1 T2.0	1	
9	76634-0003-00	FERRITE;DB-867CPE T4.1 W7.0 L1310	1	
10	77364-212-610	PIN-DOOR;MSWR ZPC3	2	

Exploded View & Parts List - Control Parts

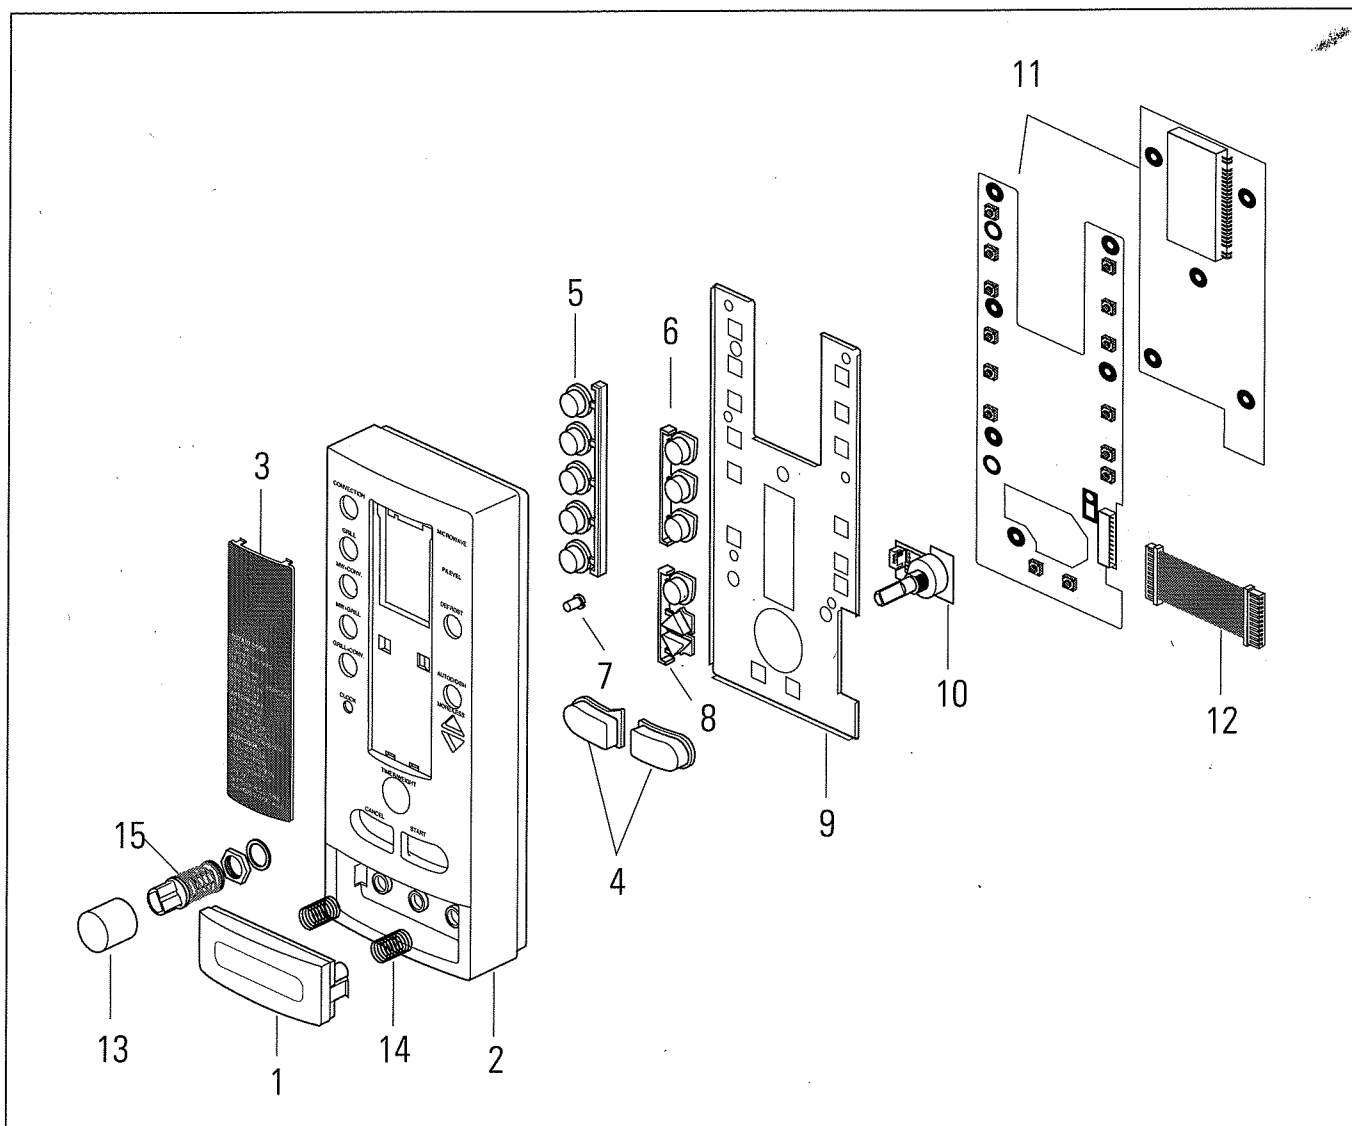

Ref. No.	Parts No.	Description / Specification	Q'ty	Remark
1	74082-0071-00	BUTTON-PUSH;PC(LEXAN#141) RP-WH-01-K 19G RE-1280	1	RE-1280 RE-1270
2	74051-0038-00	CONTROL-PANEL;PC(LEXAN#141) RP-WH-01-K 230G RE-1280	1	
2	74051-0038-04	CONTROL-PANEL;PC(LEXAN#141) RP-WH-01-K 230G RE-1270	1	
3	74073-0016-00	WINDOW-DISPLAY;ACRYL SMOG 40G RE-1280	1	
4	74083-0069-00	BUTTON-CANCEL;PC(LEXAN#141) RP-WH-01-K 6G RE-1280	2	
5	74082-0073-00	BUTTON-SELECT(L);PC(LEXAN#141) RP-WH-01-K 16G	1	
6	74083-0072-00	BUTTON-SELECT(R);PC(LEXAN#141) RP-WH-01-K 10G	1	
7	74084-0074-00	BUTTON-CLOCK;PC(LEXAN#141) RP-WH-01-K 1G RE-1280	1	
8	74082-0070-00	BUTTON-MORE;PC(LEXAN#141) RP-WH-01-K 7G RE-1280	1	
9	73012-0190-00	BRACKET-PANEL;SECC T0.8 W107 L286.35	1	
10	A3012-0011	SW-ROTARY;1C36P 14MM NSH SDB161(9X6)PVB20F 28V10MA	1	
11	79129-0121-00	ASSY P.C.B;230V50HZ RE-1280	1	
12	79194-226-840	ASSY WIRE HARNESS-F;110/220V 60HZ MX200TCC 130MMX3	1	
13	74083-0068-00	KNOB-VOLUME;PC(LEXAN#141) RP-WH-01-K 5G RE-1280	1	
14	76674-239-310	BUTTON SPRING;HSWR P10.6	2	
15	79294-212-010	ASSY VOLUME S/W;4M17736	1	

Exploded View & Parts List - Casing Parts

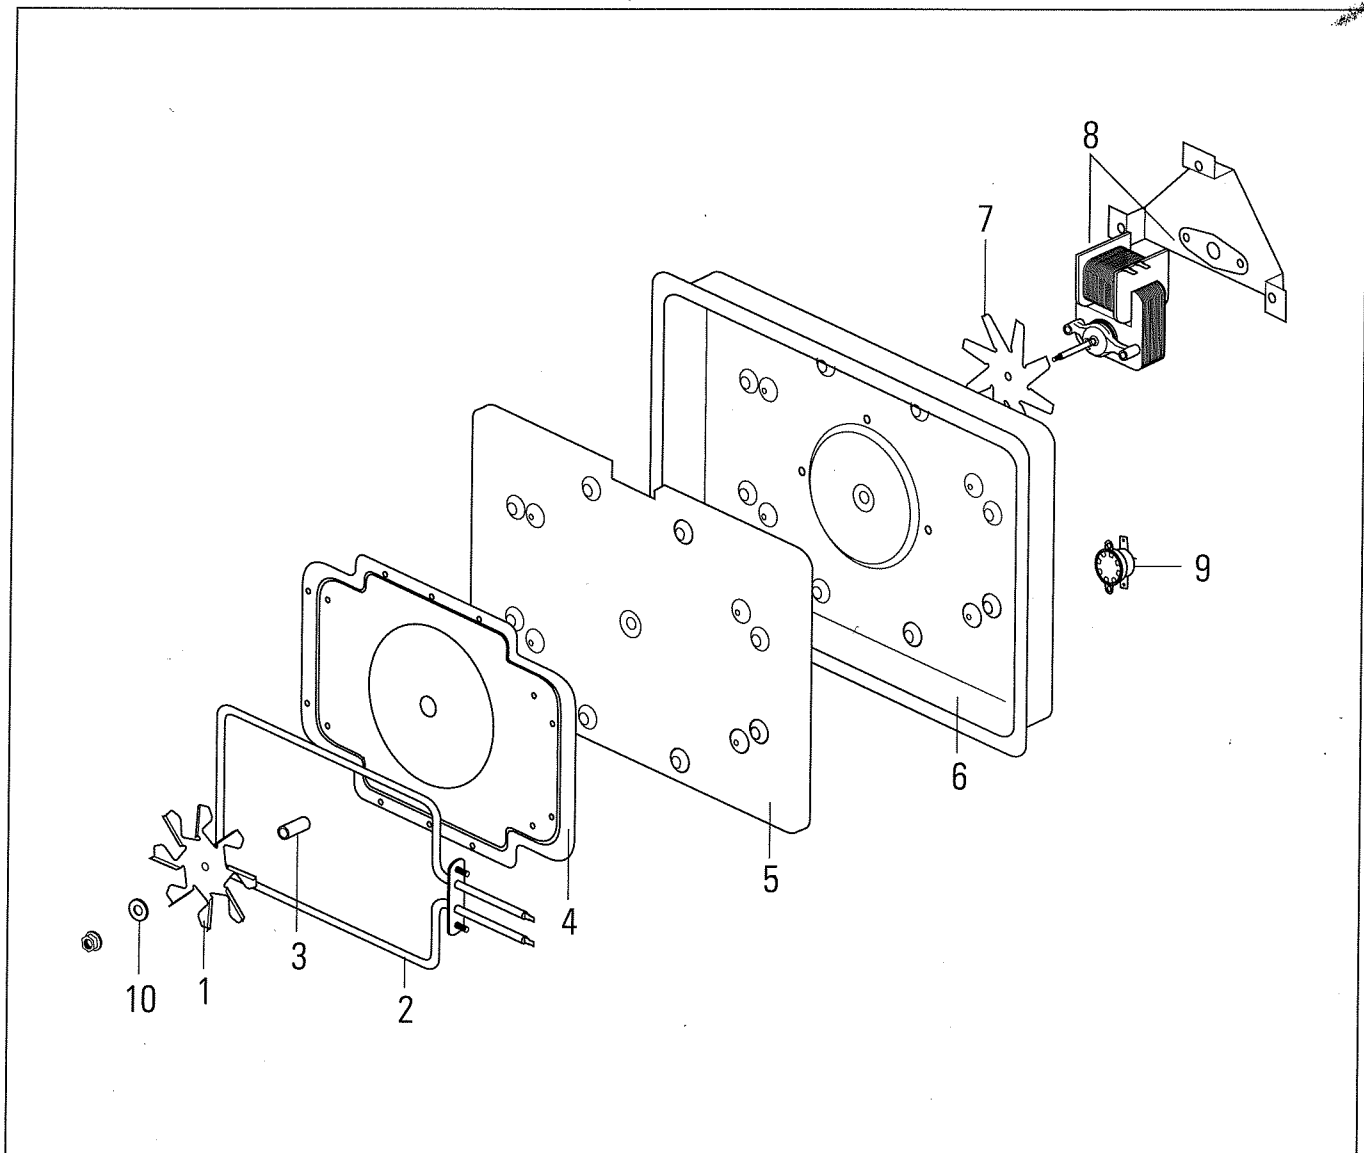

Ref. No.	Parts No.	Description / Specification	Q'ty	Remark
1	75703-202-010	BLADE FAN;ALSTAR T0.6X250X250	1	
2	76402-0008-01	HEATER-CONVECTION;D8 230V6.1A 1400W RE-1280	1	
3	75114-100-110	BUSHING MOTOR;SWRM3 PI5XP17 ZPC3	1	
4	76152-241-810	HEATER COVER "A";ALSTAR T0.6X914X1829	1	
5	70243-0005-00	ADIABATIC-HEATER;T10 W369 L277 EGF-E3019-PBS	1	
6	76152-241-910	HEATER COVER "B";SECC T0.6	1	
7	75703-201-810	COOLING FAN;SECC T0.6	1	
8	79262-0166-00	ASSY-CONV.MOTOR;AMM90-004AUEA 230V0.33A	1	
9	73589-001-039	SWITCH-THERMO;PW-2N(BKT;23.8MM,ON60'C,OFF160'C)	1	
10	77308-305-001	WASHER-PLAIN;T0.8*PI5*PI12 FE,EZY	1	

Parts List - PCB Parts

Parts No.	Description / Specification	Q'ty	Remark
72147-301-431	POWER TRANSISTOR;KSD882Y(TAPG)	1	
74737-200-001	BUZZER;CBE2220BA STICK	1	
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J01
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J02
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J03
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J04
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J05
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J06
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J07
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J08
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J09
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J10
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J11
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J12
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J13
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J14
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J15
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J16
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J17
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J18
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J19
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J20
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J21
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J22
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J23
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J24
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J25
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J26
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J27
70509-110-171	WIRE SO COPPER;0.6X63MM	1	J28
70509-110-171	WIRE SO COPPER;0.6X63MM	1	S-J29
70509-110-171	WIRE SO COPPER;0.6X63MM	1	S-J30
70509-110-171	WIRE SO COPPER;0.6X63MM	1	S-J31
70509-110-171	WIRE SO COPPER;0.6X63MM	1	S-J32
70509-110-171	WIRE SO COPPER;0.6X63MM	1	S-J33
70509-110-171	WIRE SO COPPER;0.6X63MM	1	S-J34
71018-275-102	R-METAL FILM;RM 1/4 TP 1K-F	1	R24
71018-275-104	R-METAL FILM;RM 1/4 TP 100K-F	1	R19
71018-275-502	R-METAL FILM;RM 1/4 TP 5K-F	1	R22
71018-277-102	R-CARBON;RD1/4TP 1K-J	1	R04
71018-277-102	R-CARBON;RD1/4TP 1K-J	1	R05
71018-277-102	R-CARBON;RD1/4TP 1K-J	1	R09
71018-277-102	R-CARBON;RD1/4TP 1K-J	1	R25
71018-277-102	R-CARBON;RD1/4TP 1K-J	1	R26
71018-277-103	R-CARBON;RD1/4TP 10K-J	1	R08
71018-277-103	R-CARBON;RD1/4TP 10K-J	1	R12
71018-277-103	R-CARBON;RD1/4TP 10K-J	1	R14
71018-277-103	R-CARBON;RD1/4TP 10K-J	1	R16
71018-277-103	R-CARBON;RD1/4TP 10K-J	1	R21
71018-277-103	R-CARBON;RD1/4TP 10K-J	1	R27
71018-277-103	R-CARBON;RD1/4TP 10K-J	1	R28
71018-277-202	R-CARBON;RD1/4TP 2K-J	1	R10
71018-277-202	R-CARBON;RD1/4TP 2K-J	1	R23
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R11
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R13
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R15
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R17
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R18
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R20
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R29
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R30
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R31
71018-277-392	R-CARBON;RD1/4TP 3.9K-J	1	R32
71018-277-471	R-CARBON;RD1/4TP 470-J	1	R01
71018-277-471	R-CARBON;RD1/4TP 470-J	1	R02
71018-277-471	R-CARBON;RD1/4TP 470-J	1	R03
71018-277-473	R-CARBON;RD1/4TP 47K-J	1	S-R33
71018-277-473	R-CARBON;RD1/4TP 47K-J	1	S-R34

Parts List - PCB Parts

Parts No.	Description / Specification	Q'ty	Remark
71018-277-473	R-CARBON;RD1/4TP 47K-J	1	S-R35
71018-277-473	R-CARBON;RD1/4TP 47K-J	1	S-R36
71018-277-512	R-CARBON;RD1/4TP 5.1K-J	1	R06
71018-277-512	R-CARBON;RD1/4TP 5.1K-J	1	R07
71417-065-270	C-CERAMIC;CC45SL(TAPG)50V 27PF-K	1	C08
71417-065-270	C-CERAMIC;CC45SL(TAPG)50V 27PF-K	1	C09
71607-401-040	C-ELECTROLYTIC;CE 0.4W(TAPG)50V 10UF	1	C10
71607-401-040	C-ELECTROLYTIC;CE 0.4W(TAPG)50V 10UF	1	C11
71607-402-004	C-ELECTROLYTIC;CE 0.4W(TAPG)50V 1UF	1	C13
71607-402-294	C-ELECTROLYTIC;CE0.4W35V470UF(TAPG)	1	C01
71607-402-294	C-ELECTROLYTIC;CE0.4W35V470UF(TAPG)	1	C02
71607-402-297	C-ELECTROLYTIC;CE0.4W25V1000UF(TAPG)	1	C03
72137-101-064	PNP-TRANSISTOR ; KSA 539Y (TAPG)	1	Q09
72137-101-064	PNP-TRANSISTOR ; KSA 539Y (TAPG)	1	Q12
72137-301-010	NPN-TRANSISTOR;KSC 815-Y(TAPG)	1	Q02
72137-301-010	NPN-TRANSISTOR;KSC 815-Y(TAPG)	1	Q03
72137-301-010	NPN-TRANSISTOR;KSC 815-Y(TAPG)	1	Q10
72137-301-010	NPN-TRANSISTOR;KSC 815-Y(TAPG)	1	Q11
72169-406-230	ZENER DIODE;UZ-5.1BTP	1	ZD01
72169-406-246	DIODE-ZENER;UZ-3.9BTP	1	ZD03
72169-406-260	DIODE ZENER;13V 0.5W 5%	1	ZD02
73349-202-120	CONNECTOR;JST B3B-XH-A/2521P03V000	1	CON05
73349-202-120	CONNECTOR;JST B3B-XH-A/2521P03V000	1	ECON07
73349-206-782	XH-CONNECTOR;B4B-XH-4/2521P04V000	1	CON03
73349-206-811	XH-CONNECTOR;B5B-XH-A/2521P05V000	1	CON01
74537-001-001	CERAMIC RESONATOR;CSA 4.19MG(TAPG)	1	X-TAL
74729-204-528	POWER RELAY;KM1-M12NIL	1	DAMPER
74729-204-528	POWER RELAY;KM1-M12NIL	1	FAN
77199-0090-00	MICOM;TMS73C91-C69403 RE1280 DIP	1	MICOM
A1100-0340	C-CERAMIC;CK OA Y5V 50V T 104-Z UP050F104ZBB	1	C05
A1100-0340	C-CERAMIC;CK OA Y5V 50V T 104-Z UP050F104ZBB	1	C06
A1100-0340	C-CERAMIC;CK OA Y5V 50V T 104-Z UP050F104ZBB	1	C07
A1100-0340	C-CERAMIC;CK OA Y5V 50V T 104-Z UP050F104ZBB	1	C12
A1100-0340	C-CERAMIC;CK OA Y5V 50V T 104-Z UP050F104ZBB	1	C18
A1100-0802	C-CERAMIC;CG OA Y5R 16V T 332-M EP050X332MB	1	C14
A1100-0802	C-CERAMIC;CG OA Y5R 16V T 332-M EP050X332MB	1	C15
A1100-0802	C-CERAMIC;CG OA Y5R 16V T 332-M EP050X332MB	1	C16
A1100-0802	C-CERAMIC;CG OA Y5R 16V T 332-M EP050X332MB	1	C17
A1104-0015	C-ELEC;CE 04 C 10V T 101-M LN W SRA 6.3X7X2.5	1	C04
A4060-0008	TR-W/RESISTOR;KSR1005 300MW 100MA 50V EBN/4.7KR1	1	Q04
A4060-0008	TR-W/RESISTOR;KSR1005 300MW 100MA 50V EBN/4.7KR1	1	Q05
A4060-0008	TR-W/RESISTOR;KSR1005 300MW 100MA 50V EBN/4.7KR1	1	Q06
A4060-0008	TR-W/RESISTOR;KSR1005 300MW 100MA 50V EBN/4.7KR1	1	Q08
A4060-0009	TR-W/RESISTOR;KSR2005 300MW -100MA -50V EBP/4.7KR1	1	Q07
A4100-0003	DIODE-SW;1N4148 1.2V 4.0NS T	1	D04
A4100-0003	DIODE-SW;1N4148 1.2V 4.0NS T	1	S-D09
A4100-0003	DIODE-SW;1N4148 1.2V 4.0NS T	1	S-D10
A4100-0003	DIODE-SW;1N4148 1.2V 4.0NS T	1	S-D11
A4100-0003	DIODE-SW;1N4148 1.2V 4.0NS T	1	S-D12
A4100-0003	DIODE-SW;1N4148 1.2V 4.0NS T	1	S-D13
A4100-0003	DIODE-SW;1N4148 1.2V 4.0NS T	1	S-D14
A6010-0470	CONNECTOR-WAFER;YW396-07AV WHT	1	CON04
B4104-0001	DIODE-RECT;1N4001 50V 1A T	1	D01
B4104-0001	DIODE-RECT;1N4001 50V 1A T	1	D02
B4104-0001	DIODE-RECT;1N4001 50V 1A T	1	D03
B4104-0001	DIODE-RECT;1N4001 50V 1A T	1	D05
B4104-0001	DIODE-RECT;1N4001 50V 1A T	1	D06
B4104-0001	DIODE-RECT;1N4001 50V 1A T	1	D07
B4104-0001	DIODE-RECT;1N4001 50V 1A T	1	D08
A3068-0080	RELAY;CS-1PD DC12V16A	1	POWER
A3068-0080	RELAY;CS-1PD DC12V16A	1	MAIN
A3068-0080	RELAY;CS-1PD DC12V16A	1	GRILL
A3068-0080	RELAY;CS-1PD DC12V16A	1	INRUSH
A3068-0080	RELAY;CS-1PD DC12V16A	1	CONV-H
A3068-0080	RELAY;CS-1PD DC12V16A	1	CONV-M
A4012-0005	IC-LINEAR;KA2657N DIP LED DRIVE	1	
A4153-0063	V.F.DISPLAY;SVM-4MS13S MWO RE-1280	1	
A6000-0034	CONNECTOR-ASSY,BSS;YMT-025-11/YMT-025-11 1007#26	1	
A6010-0041	CONNECTOR-WAFER;YMW-025-11	1	CON02
A6010-0064	CONNECTOR-WAFER;YMAW-025-11	1	CON06
A6010-0075	CONNECTOR-WAFER;YFW-500-01	1	