




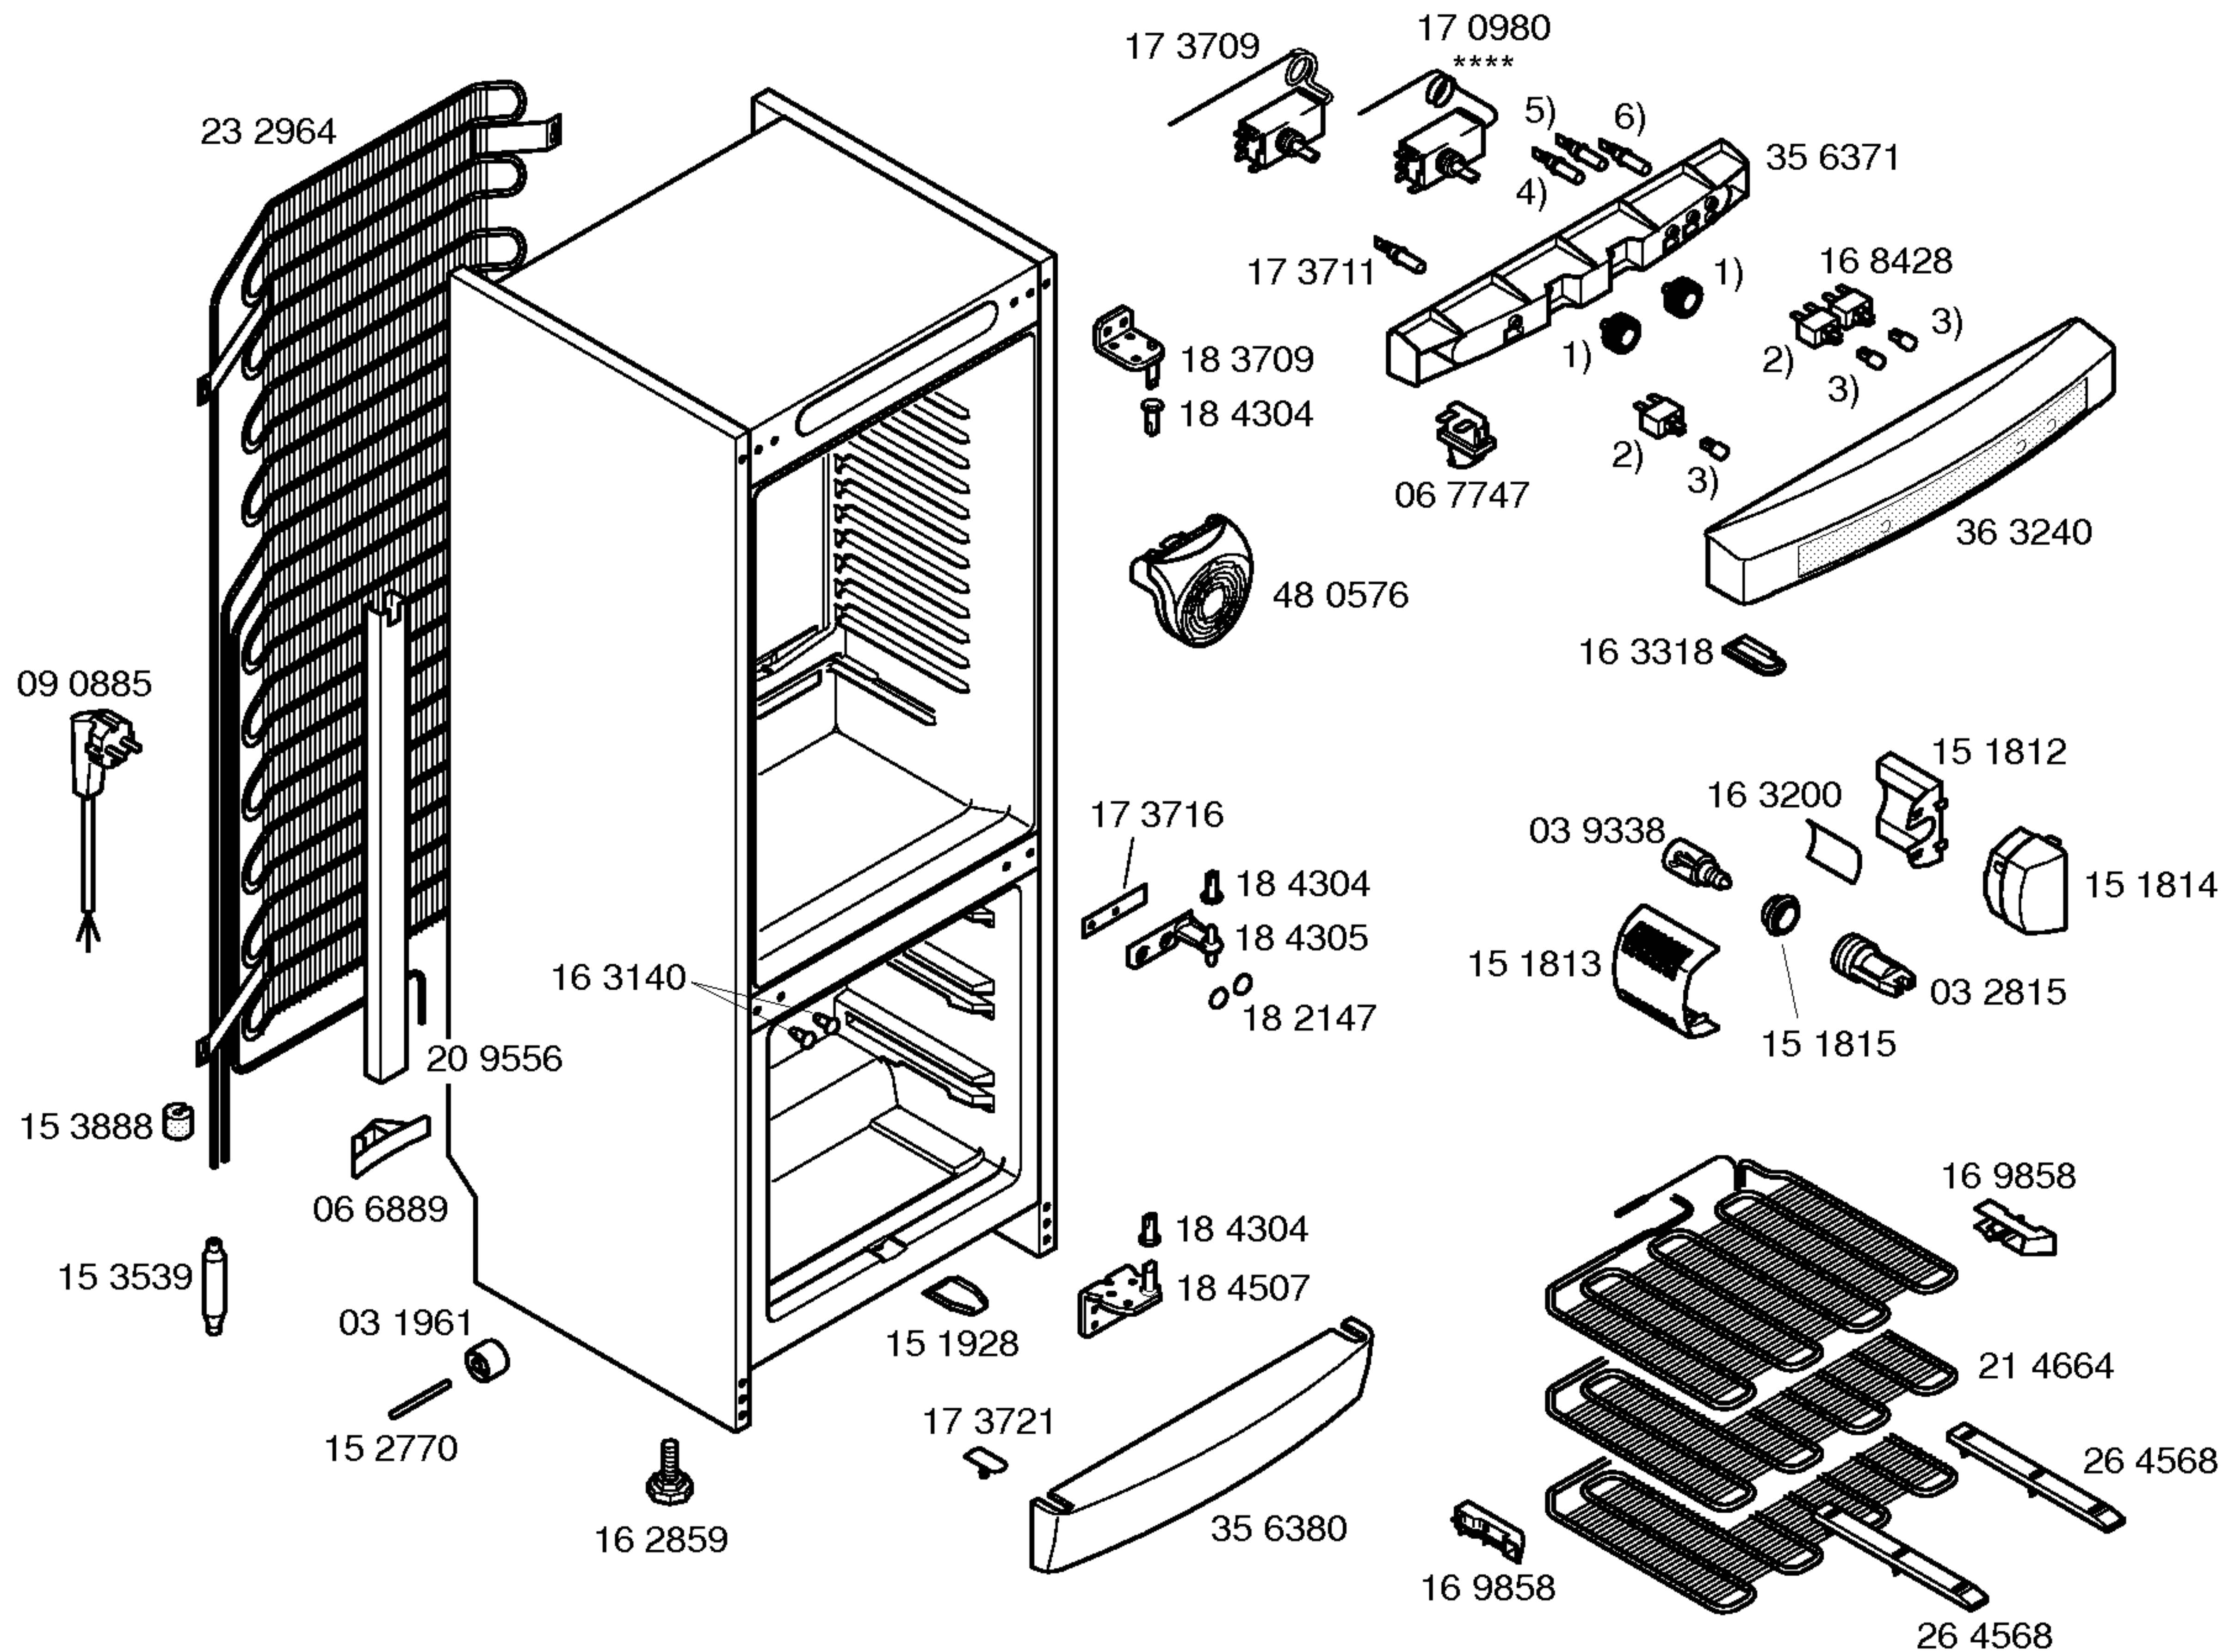

Libro de instrucciones
52 9563
(de,en,fr,es,pt)

- 1) 16 5458
- 2) 16 8427
- 3) 17 4468
- 4) 17 3711 Verde
- 5) 17 3712 Ambar
- 6) 17 3713 Rojo

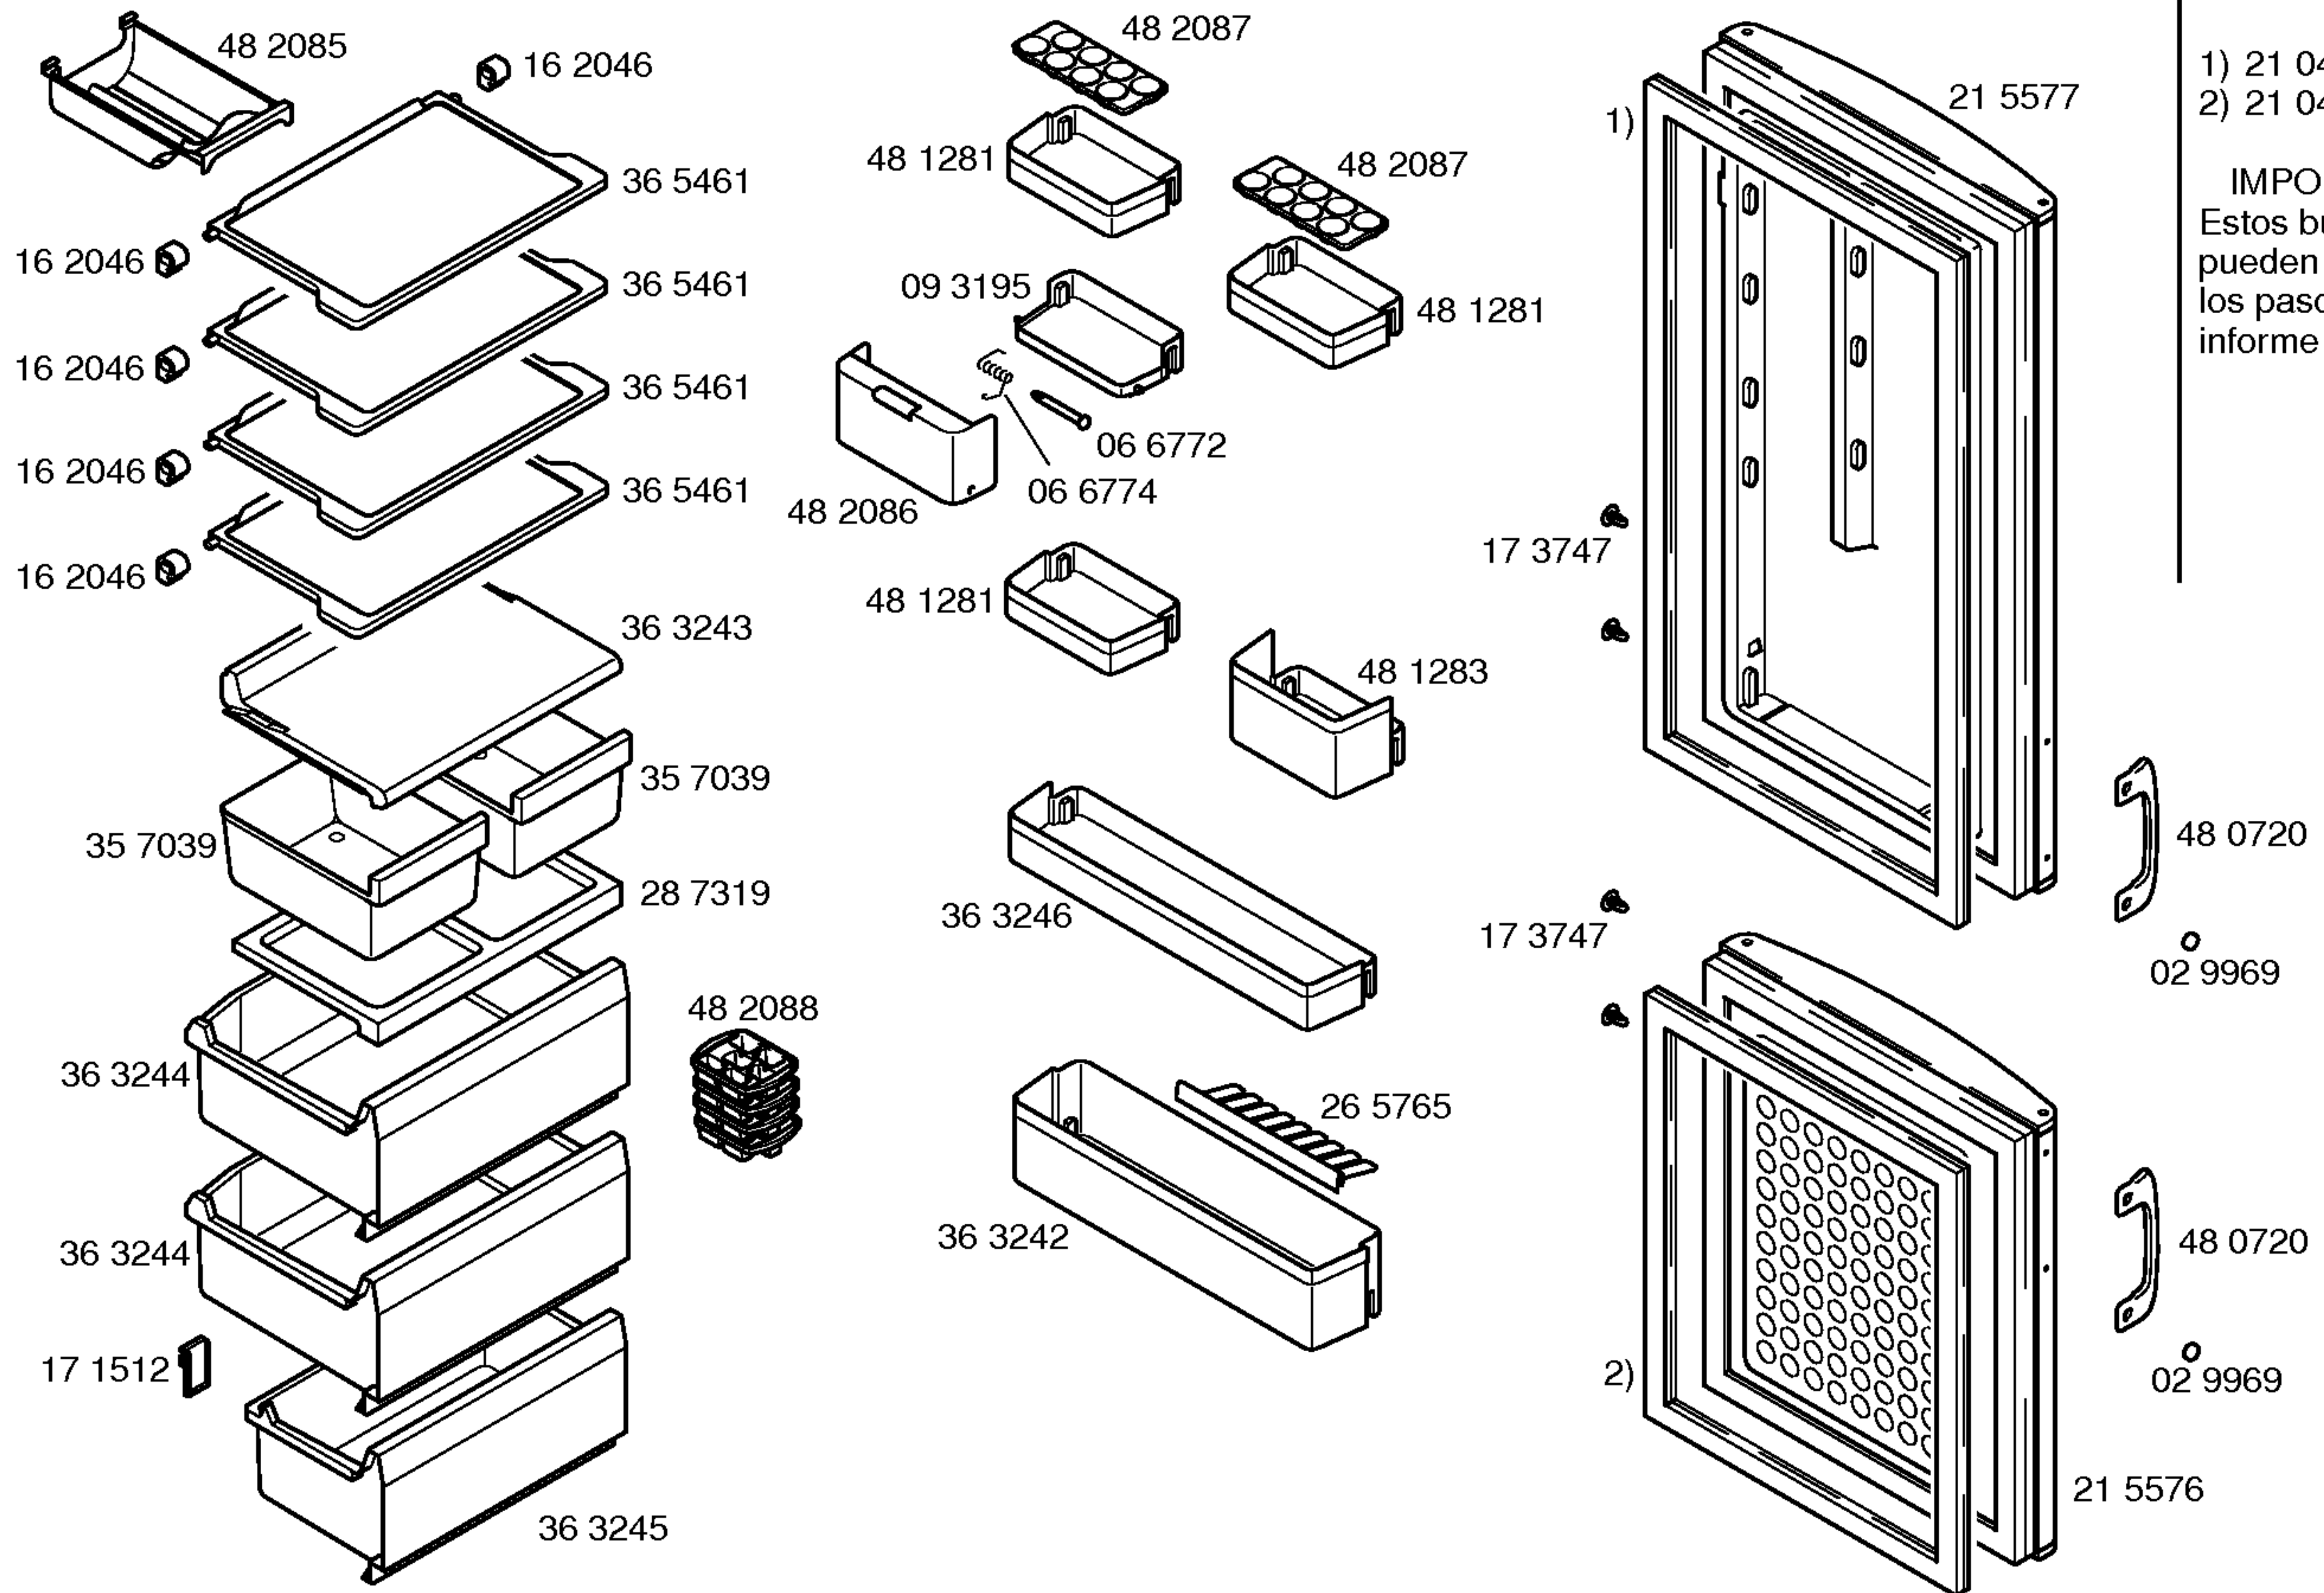

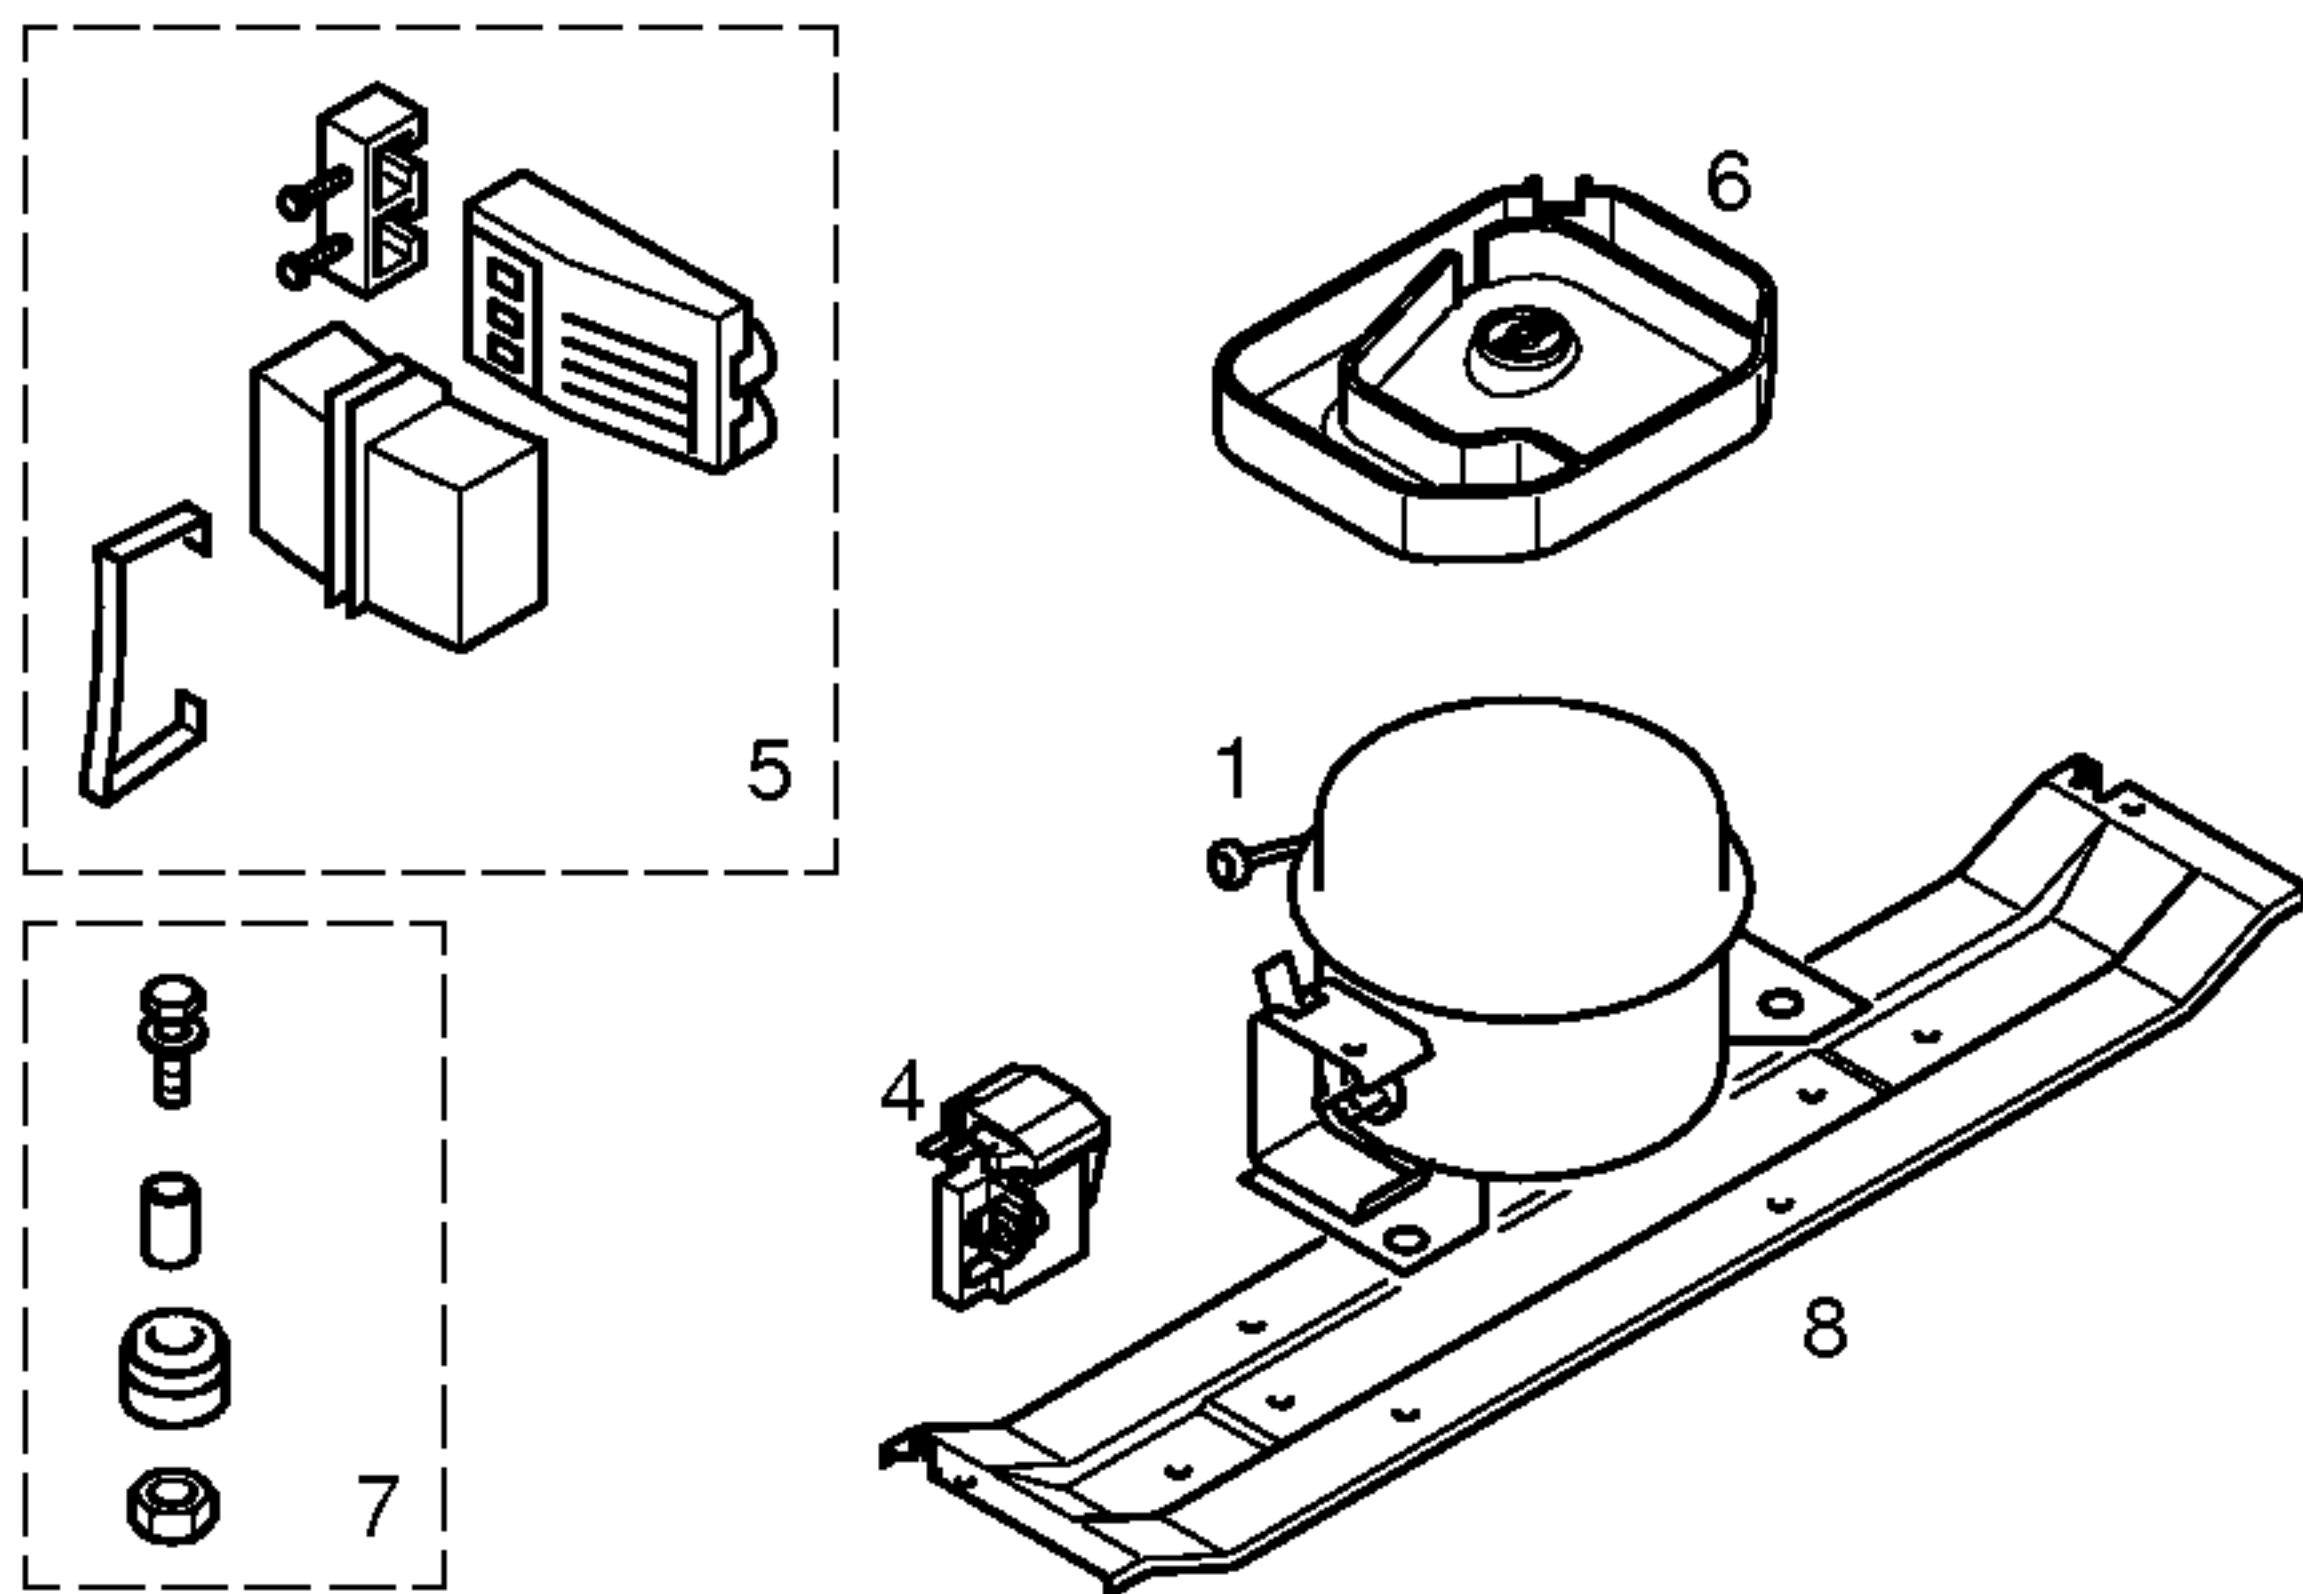

Pos.	*****			
		V01	V02	
	LG	LG	Aspera	
	NDA62NAEG	NDA69NAEG	EMT40-CLP	
1	14 2000	14 2001	14 2001	
2				
3				
4	17 1011	17 1011	41 6671	
5				
6	48 4330			
7	05 0166	05 0166	05 0166	
8	28 8253	28 8253	28 8253	
9				
10				
11				
12				
13				

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES / DATOS TECNICOS

		V01	V02	
Verdichter/Compressor/Compresseur/Compresor		LG	LG	Aspera
Typ/Type/Tipo		NDA62NAEG	NDA69NAEG	EMT40-CLP
Förderleistung/Delivery/Debit/Aspiración l/h				
Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A		0,48	0,50	
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm		35,21	35,21	
Hi/aux. Ohm		21,49	21,49	
Temp.Reyler/Thermostat/Termostato		Danfoss	Ranco	
Typ/Type/Tipo		077B6181	K54-L2006	
Reglerstellung/Position/Conexión		MIN. MAX.	MIN. MAX.	
Schaltwerte/Switching values/ ..ein/conex. °C		+6º	-14º -22º	
Valeurs de commutation/Desconex. ..aus"/descon.ºC		-11º -28º	-20º -28º	
(..abtaven' od) ..alarm' °C			-10º -18º	
Füllmenge/Fill. quantily/Charge/Carga R600a. g		*	*	*
Anschlusswert/Comm. load/Puiss. Connect./Potenc. W		71	83	90
Heizung/Heater/Chauflage/Resistenc.descong.				
Widerstand/Resistance/Resistencia Ohm				
Leistung/Power/Puissance/Potencia W				
Ventilador/Blower/Ventilateur/Ventilador				
Widerstand/Resistance/Resistencia Ohm				
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula				
Widerstand/Resistance/Resistencia Ohm				
Spannung/Voltage/Tension/Tensión V				
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador				

* Siehe Typenschild / See identification plate / Voir plaque de caractéristiques / Ver plaqueta de características