

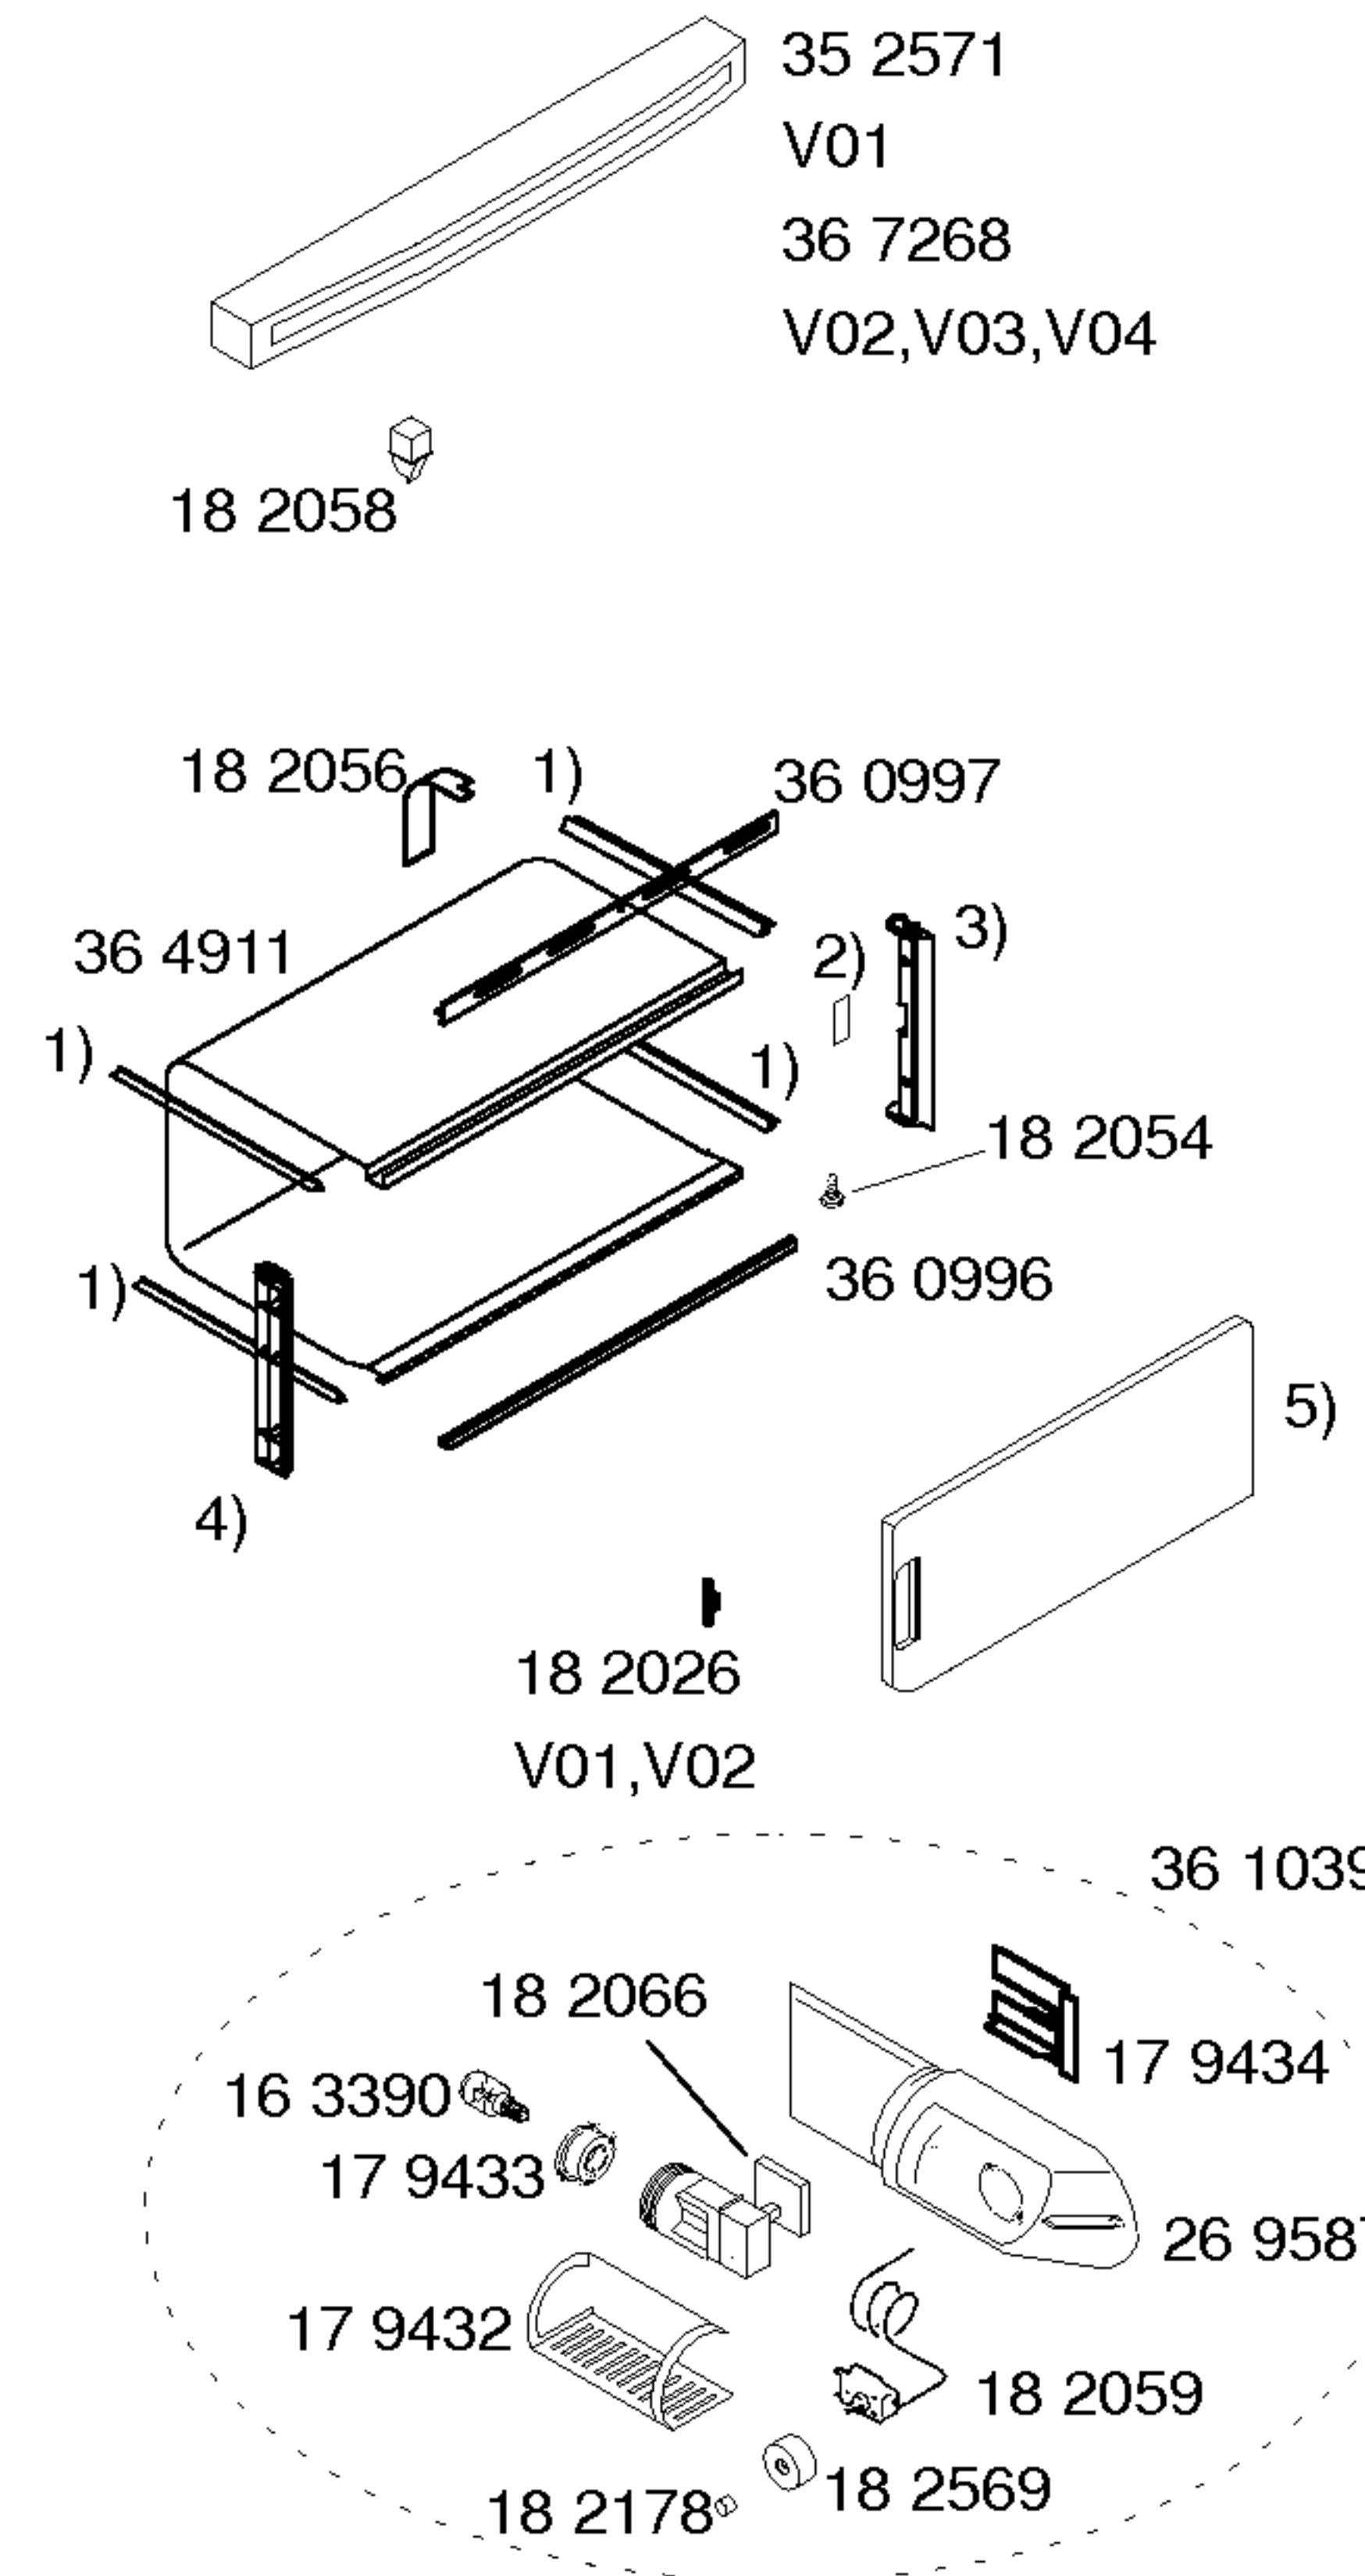


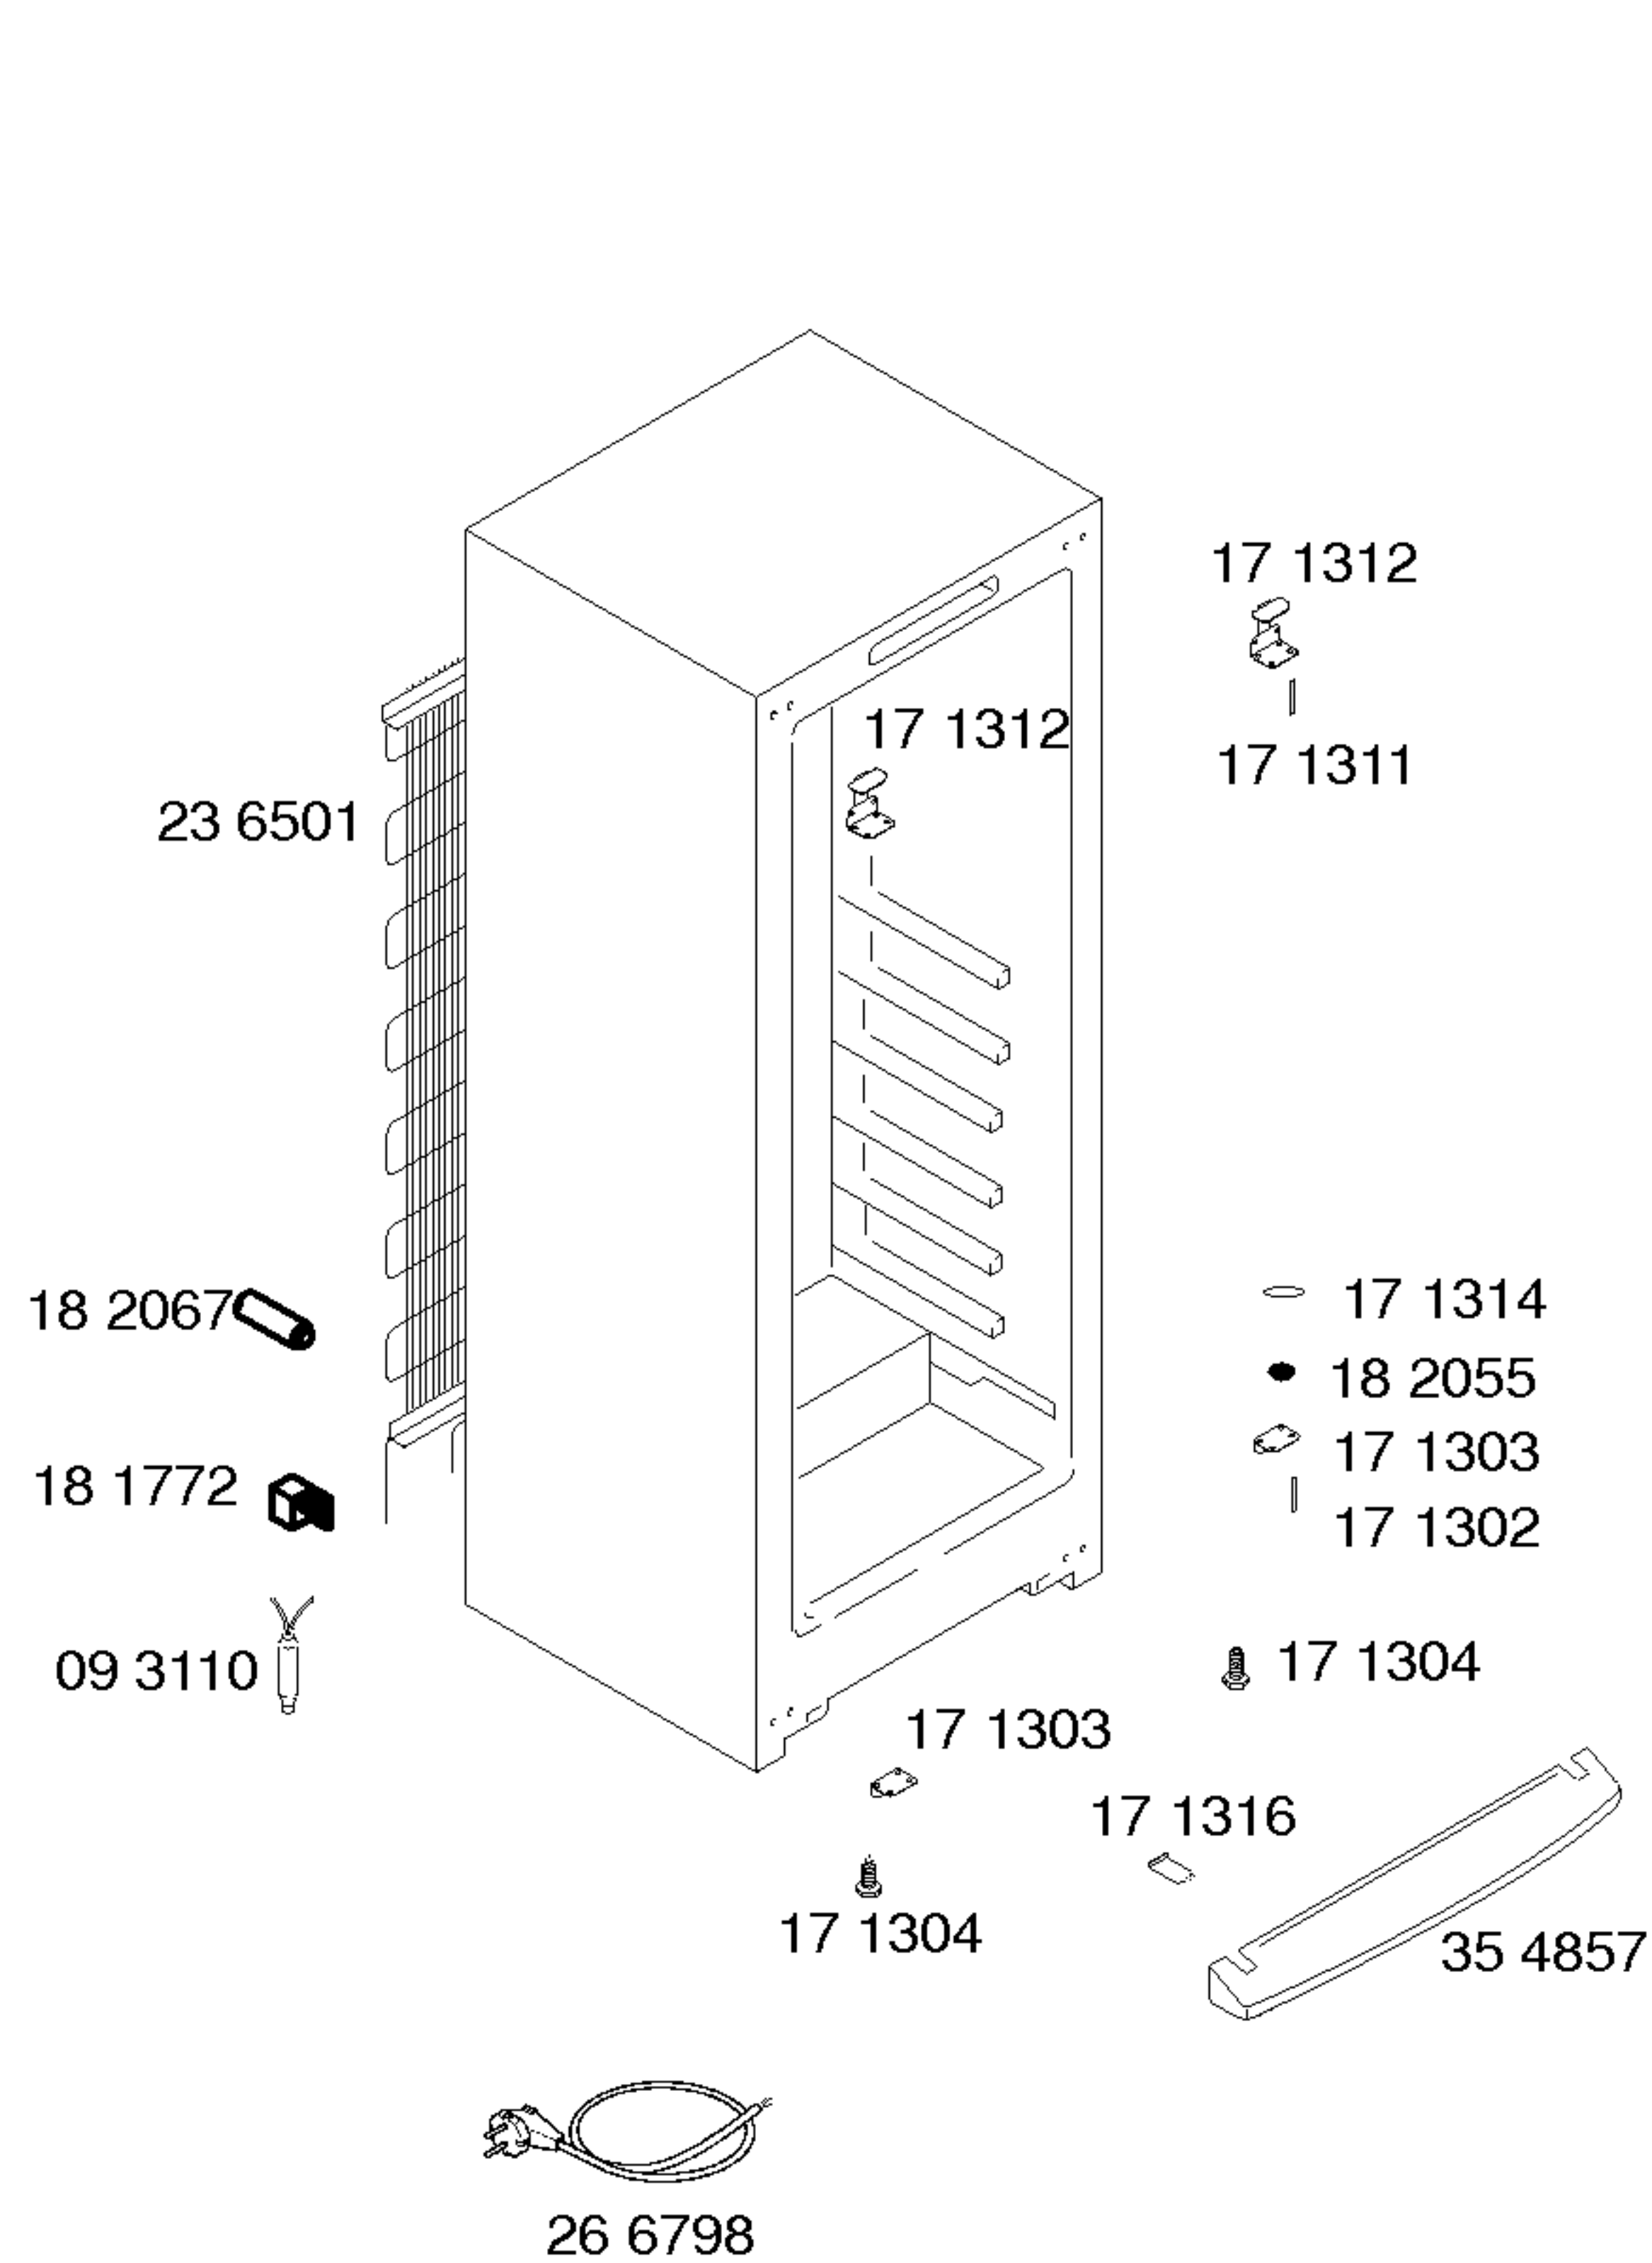


Gebrauchsanweisung
52 8961
ES,EN,FR,PT,DE

- 1) 48 0752
- 2) 18 2057
- 3) 48 0753
- V01,V02
- 48 4112
- V03,V04
- 4) 48 0754
- V01,V02
- 48 4111
- V03,V04
- 5) 36 2573
- V01,V02
- 36 7267
- V03,V04

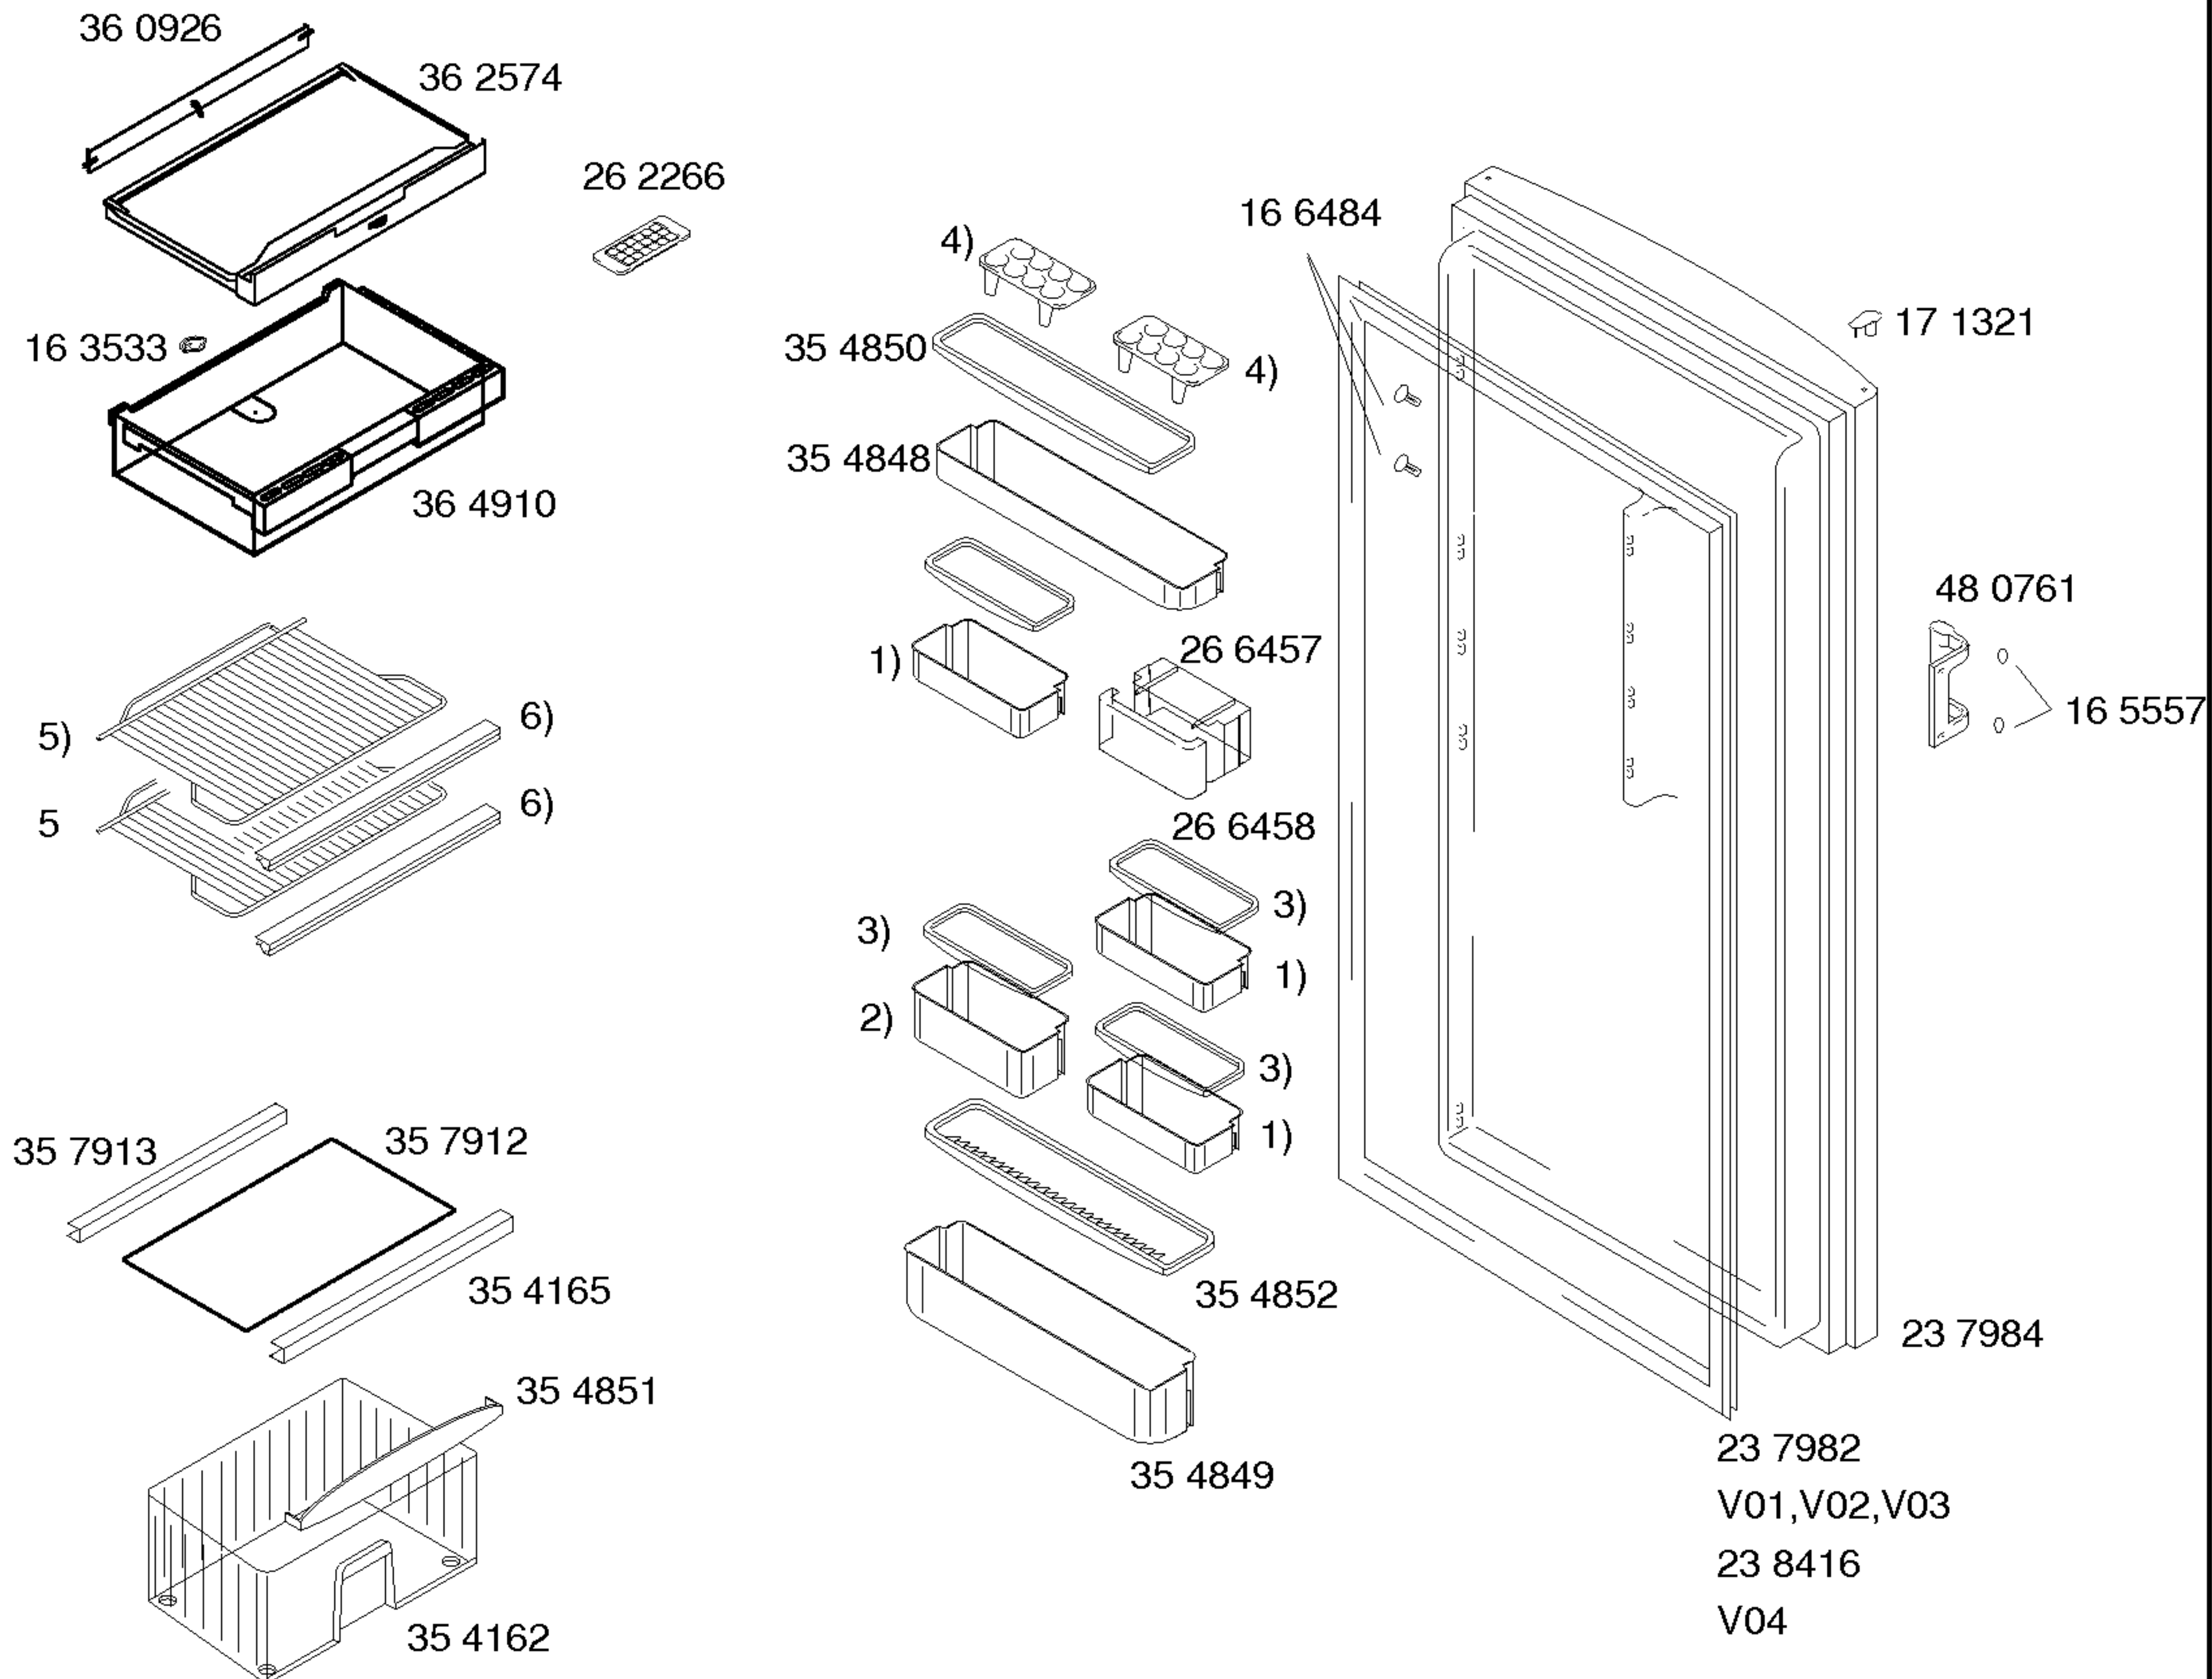

- 1) 26 6454
- 2) 26 6456
- 3) 26 6459
- 4) 26 6470
- 5) 36 0994
- 6) 35 4855

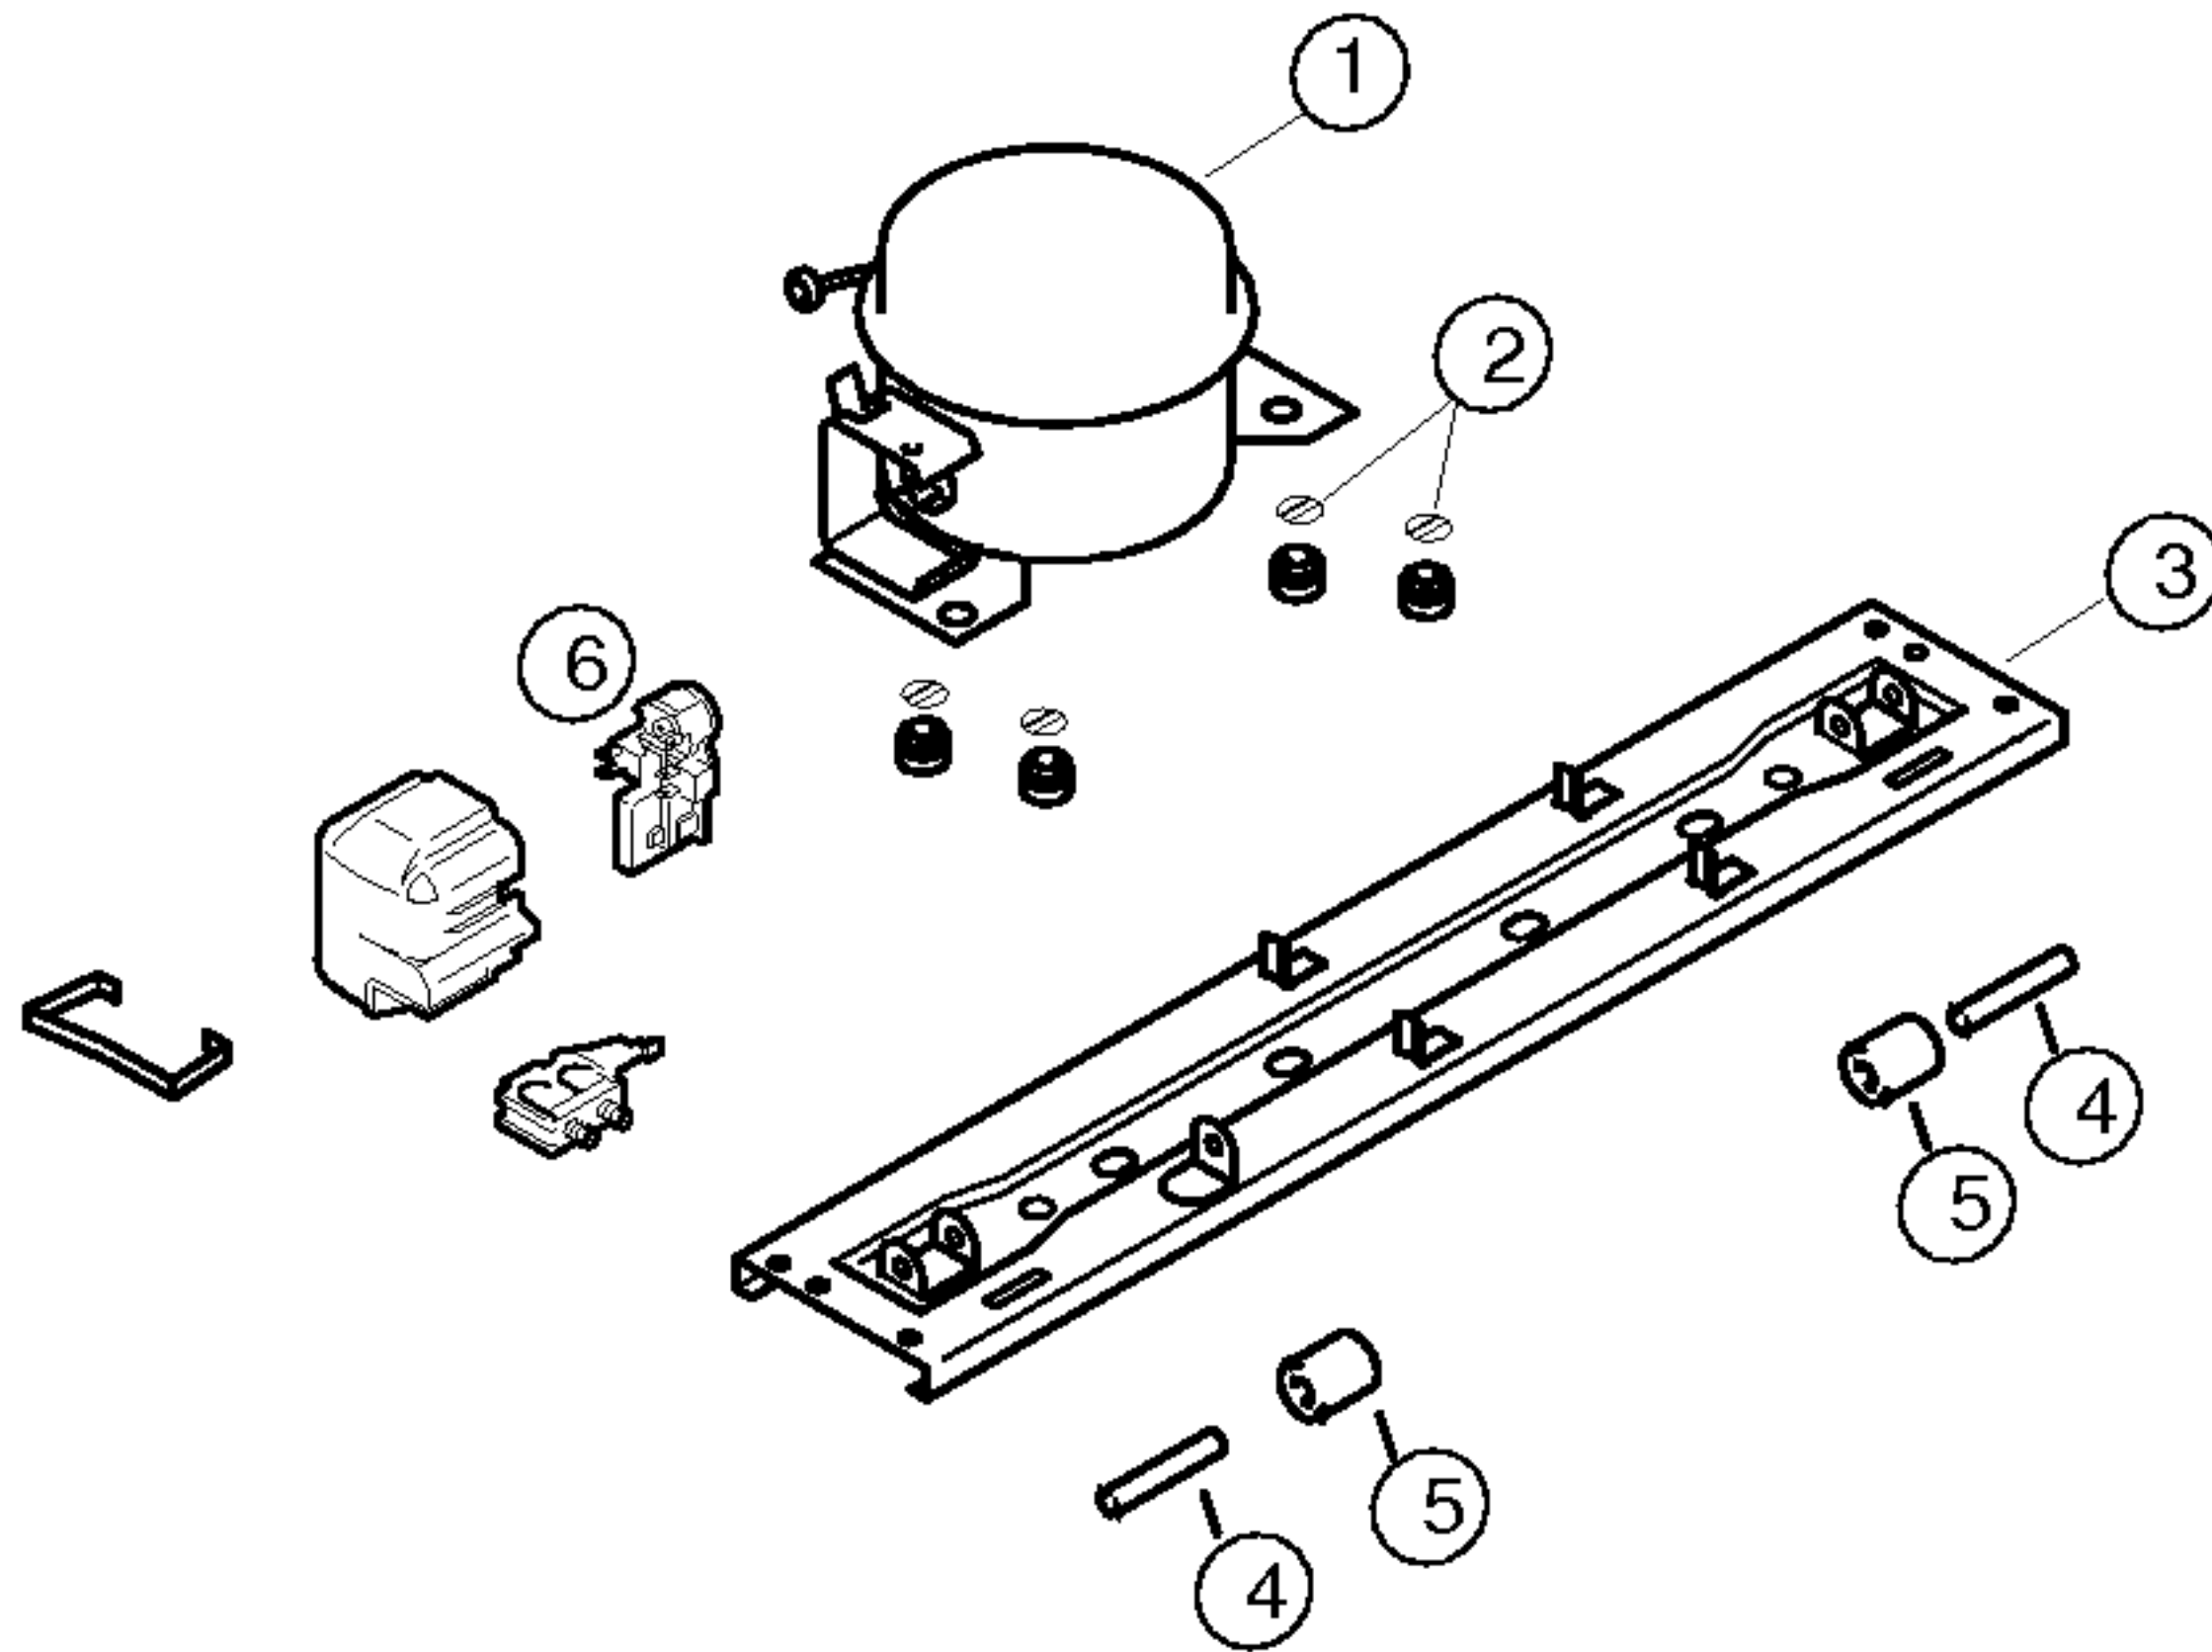

Pos.	Matsushita		
1	14 2136		
2	17 1519		
3	35 4158		
4	18 1014		
5	17 1318		
6	18 7957		
7			
8			
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör		Matsushita	
Typ/Type/Tip		DD66C	
Förderleistung/Delivery/Verim/h			
Anlaufstrom/Starting current/Giris akimi	A	9,94	
Widerstand/Resistance/Rezistans Ha/	Ω	10.55	
Hi/aux.		19.2	
Temp.Reyler/Thermostat/Termostat		K60-L2145	
Typ/Type/Tip			
Reglerstellung/Position/Termostat pozisyonu			
Schaltwerte/Acma kapama degerleri	..ein/acma °C		
Valeurs de commutation/Termostat degeri	..aus"/kapama		
(..abtaven' od)	..alarm'		
Füllmenge/Fill. quantily/ Dolum miktarı	R134a g	*	
Anschlusswert/Comm. load/Giris gucu	W		
Heizung/Heater/Rezistans	Ω		
Widerstand/Resistance/Direnc	W		
Leistung/Power/Guc			
Ventilador/Blower/Vantilatör	Ω		
Widerstand/Resistance/Rezistans			
Magnetventil/Magnetic valve/Manyetik valf	Ω		
Widerstand/Resistance/Rezistans	V		
Spannung/Voltage/Gerilim			
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakiniz