




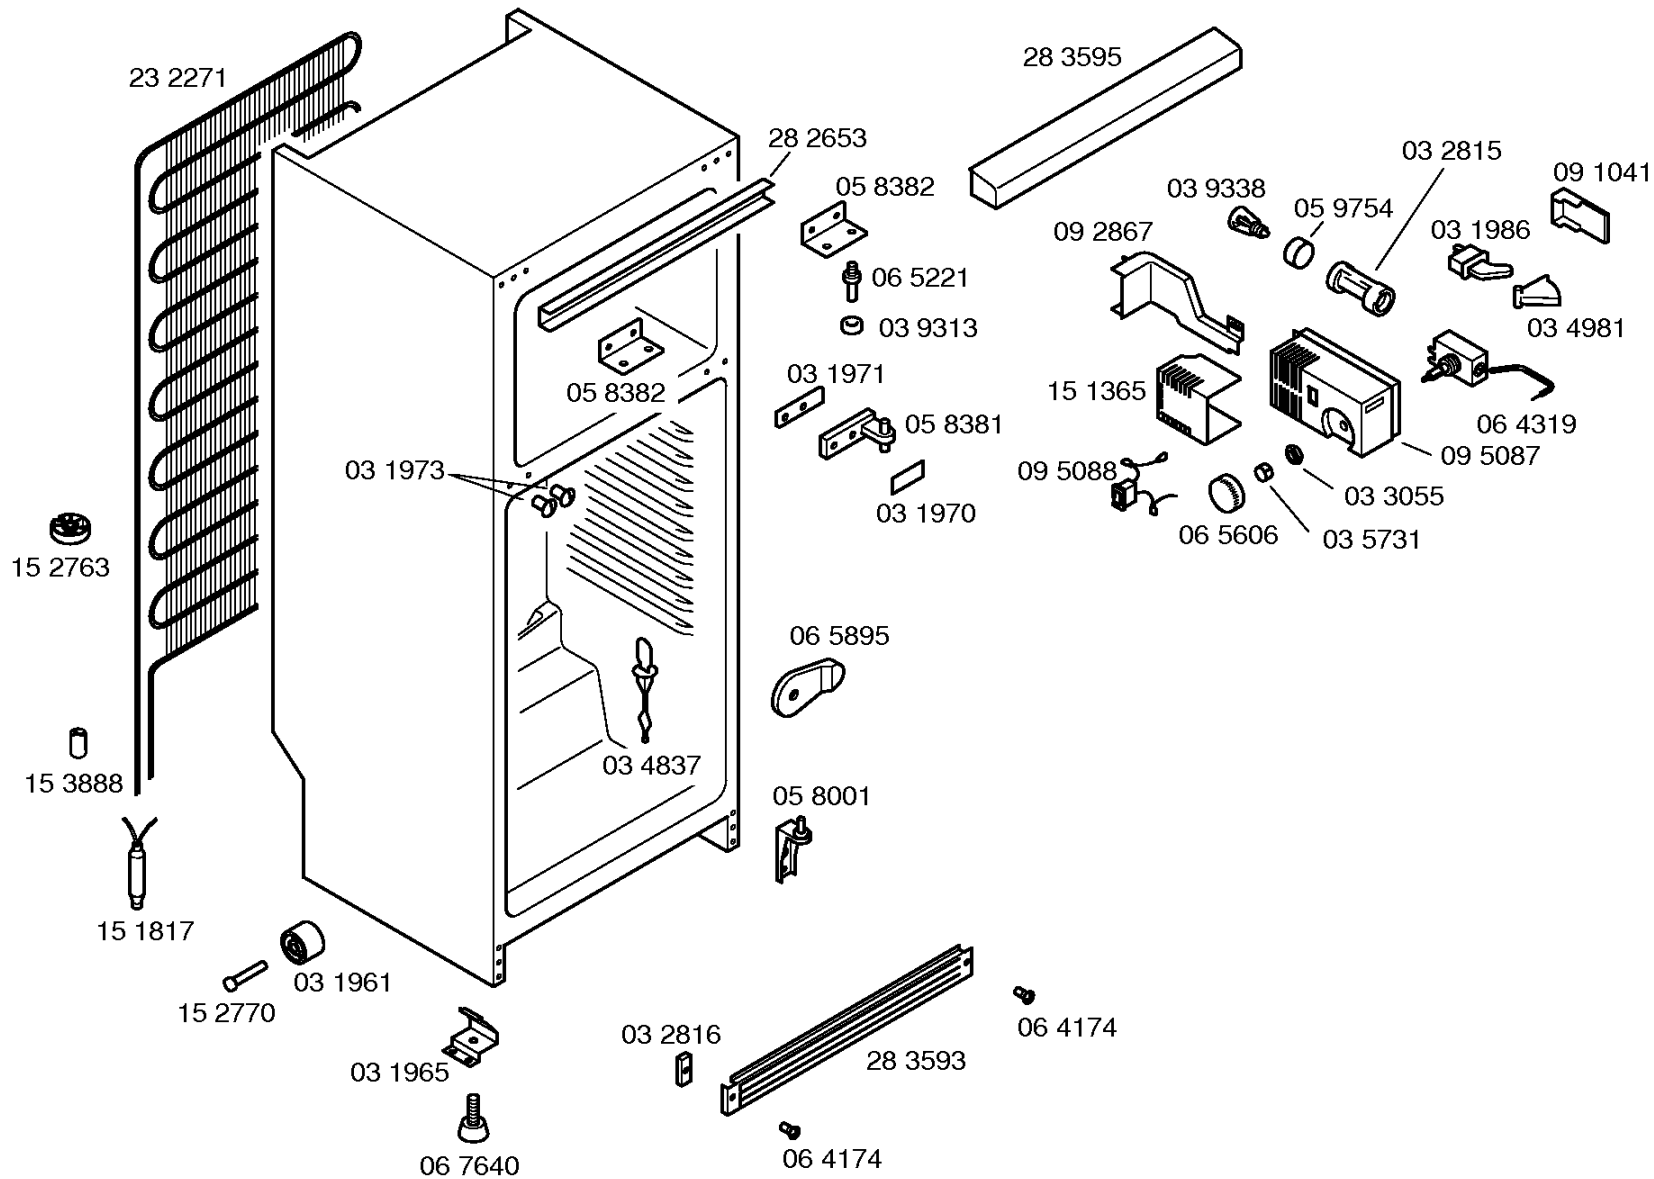

Libro de instrucciones
51 7394
(E,P,GB,F,D)

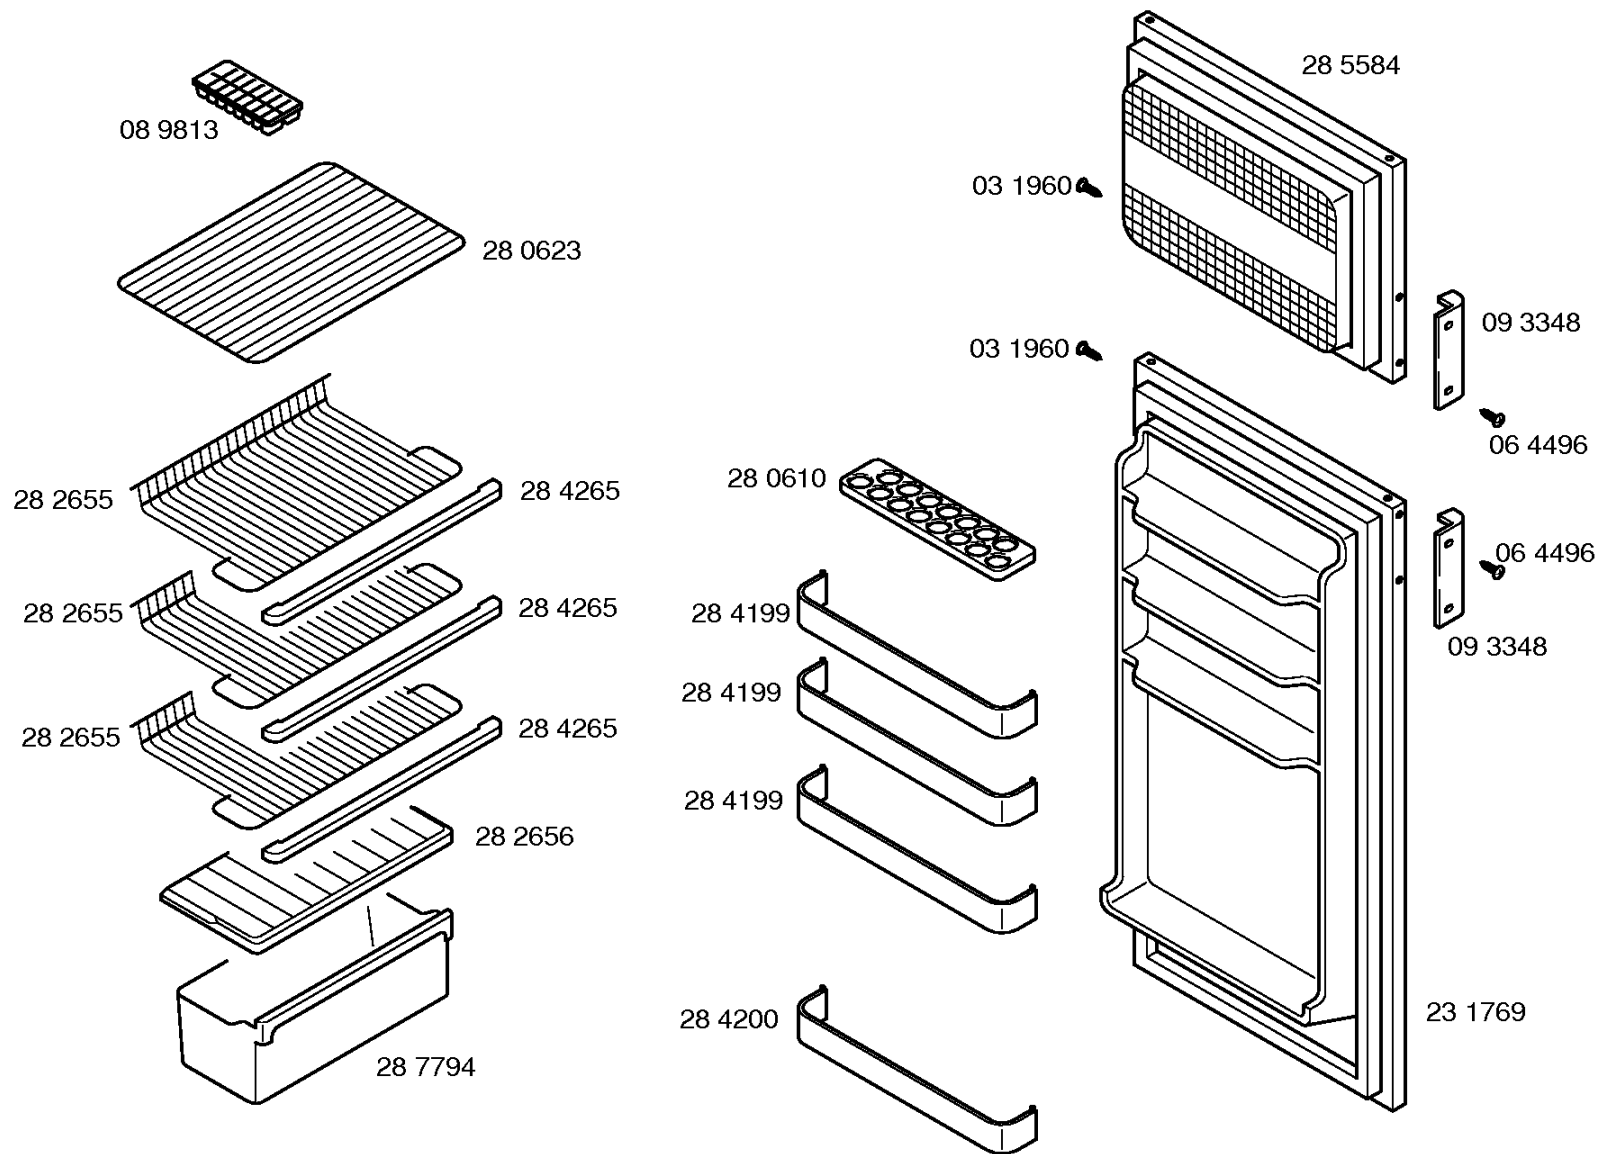

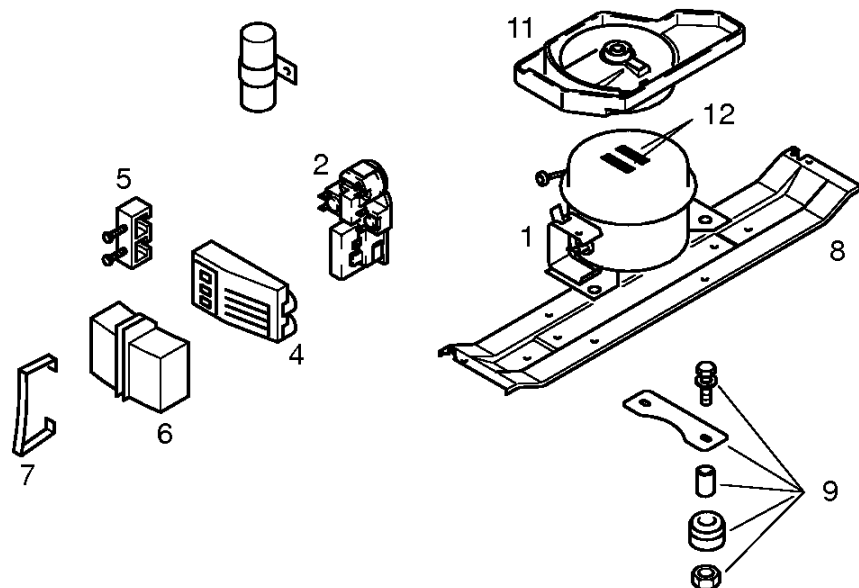

Pos.	ZEM	U. HERMÉT.
	GL90AA	GL90AA
1	14 1383	14 1360
2	15 5308	15 4851
3		
4		
5		
6		
7		
8	28 9409	28 9409
9	05 0166	05 0166
10		
11	09 6864	09 6864
12		
13		

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS

Verdichter/Compressor/Compresseur/Compresor	ZEM	U. HERMÉT.
Typ/Type/Typo	GL90AA	GL90AA
Förderleistung/Delivery/Debit/Aspiración l/h		
Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A	12,8	12,8
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm	9,2	9,0
Hi/aux.	22,8	22,4

Temp.Reyler/Thermostat/Termostato	RANCO	
Typ/Type/Typo	K52-L1561	
Reglerstellung/Position/Conexión	MIN.-MAX	
Schaltwerte/Switching values/	..ein/conex.°C	
Valeurs de commutation/Desconex.	..aus"/descon.	
(..abtaven' od)	..alarm'	
	+3,5° +6°	
	+4° +14°	

Füllmenge/Fill. quantily/Charge/Carga	134a	g	175	
---------------------------------------	------	---	-----	--

Anschlußwert/Comm. load/puiss. Connect./Potenc.	W	184	184	
---	---	-----	-----	--

Heizung/Heater/Chaufrage/Resistenc.descong.				
Widerstand/Resistance/Resistencia	Ohm			
Leistung/Power/Puissance/Potencia	W			

Ventilator/Blower/Ventilateur/Ventilador				
Widerstand/Resistance/Resistencia	Ohm	2000+—10%		

Magnetventil/Magnetic valve/Electrovanne/Electrovalvula				
Widerstand/Resistance/Resistencia	Ohm			
Spannung/Volare/Tension/Tensión	V			

Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador		+23° +3°		
---	--	----------	--	--