




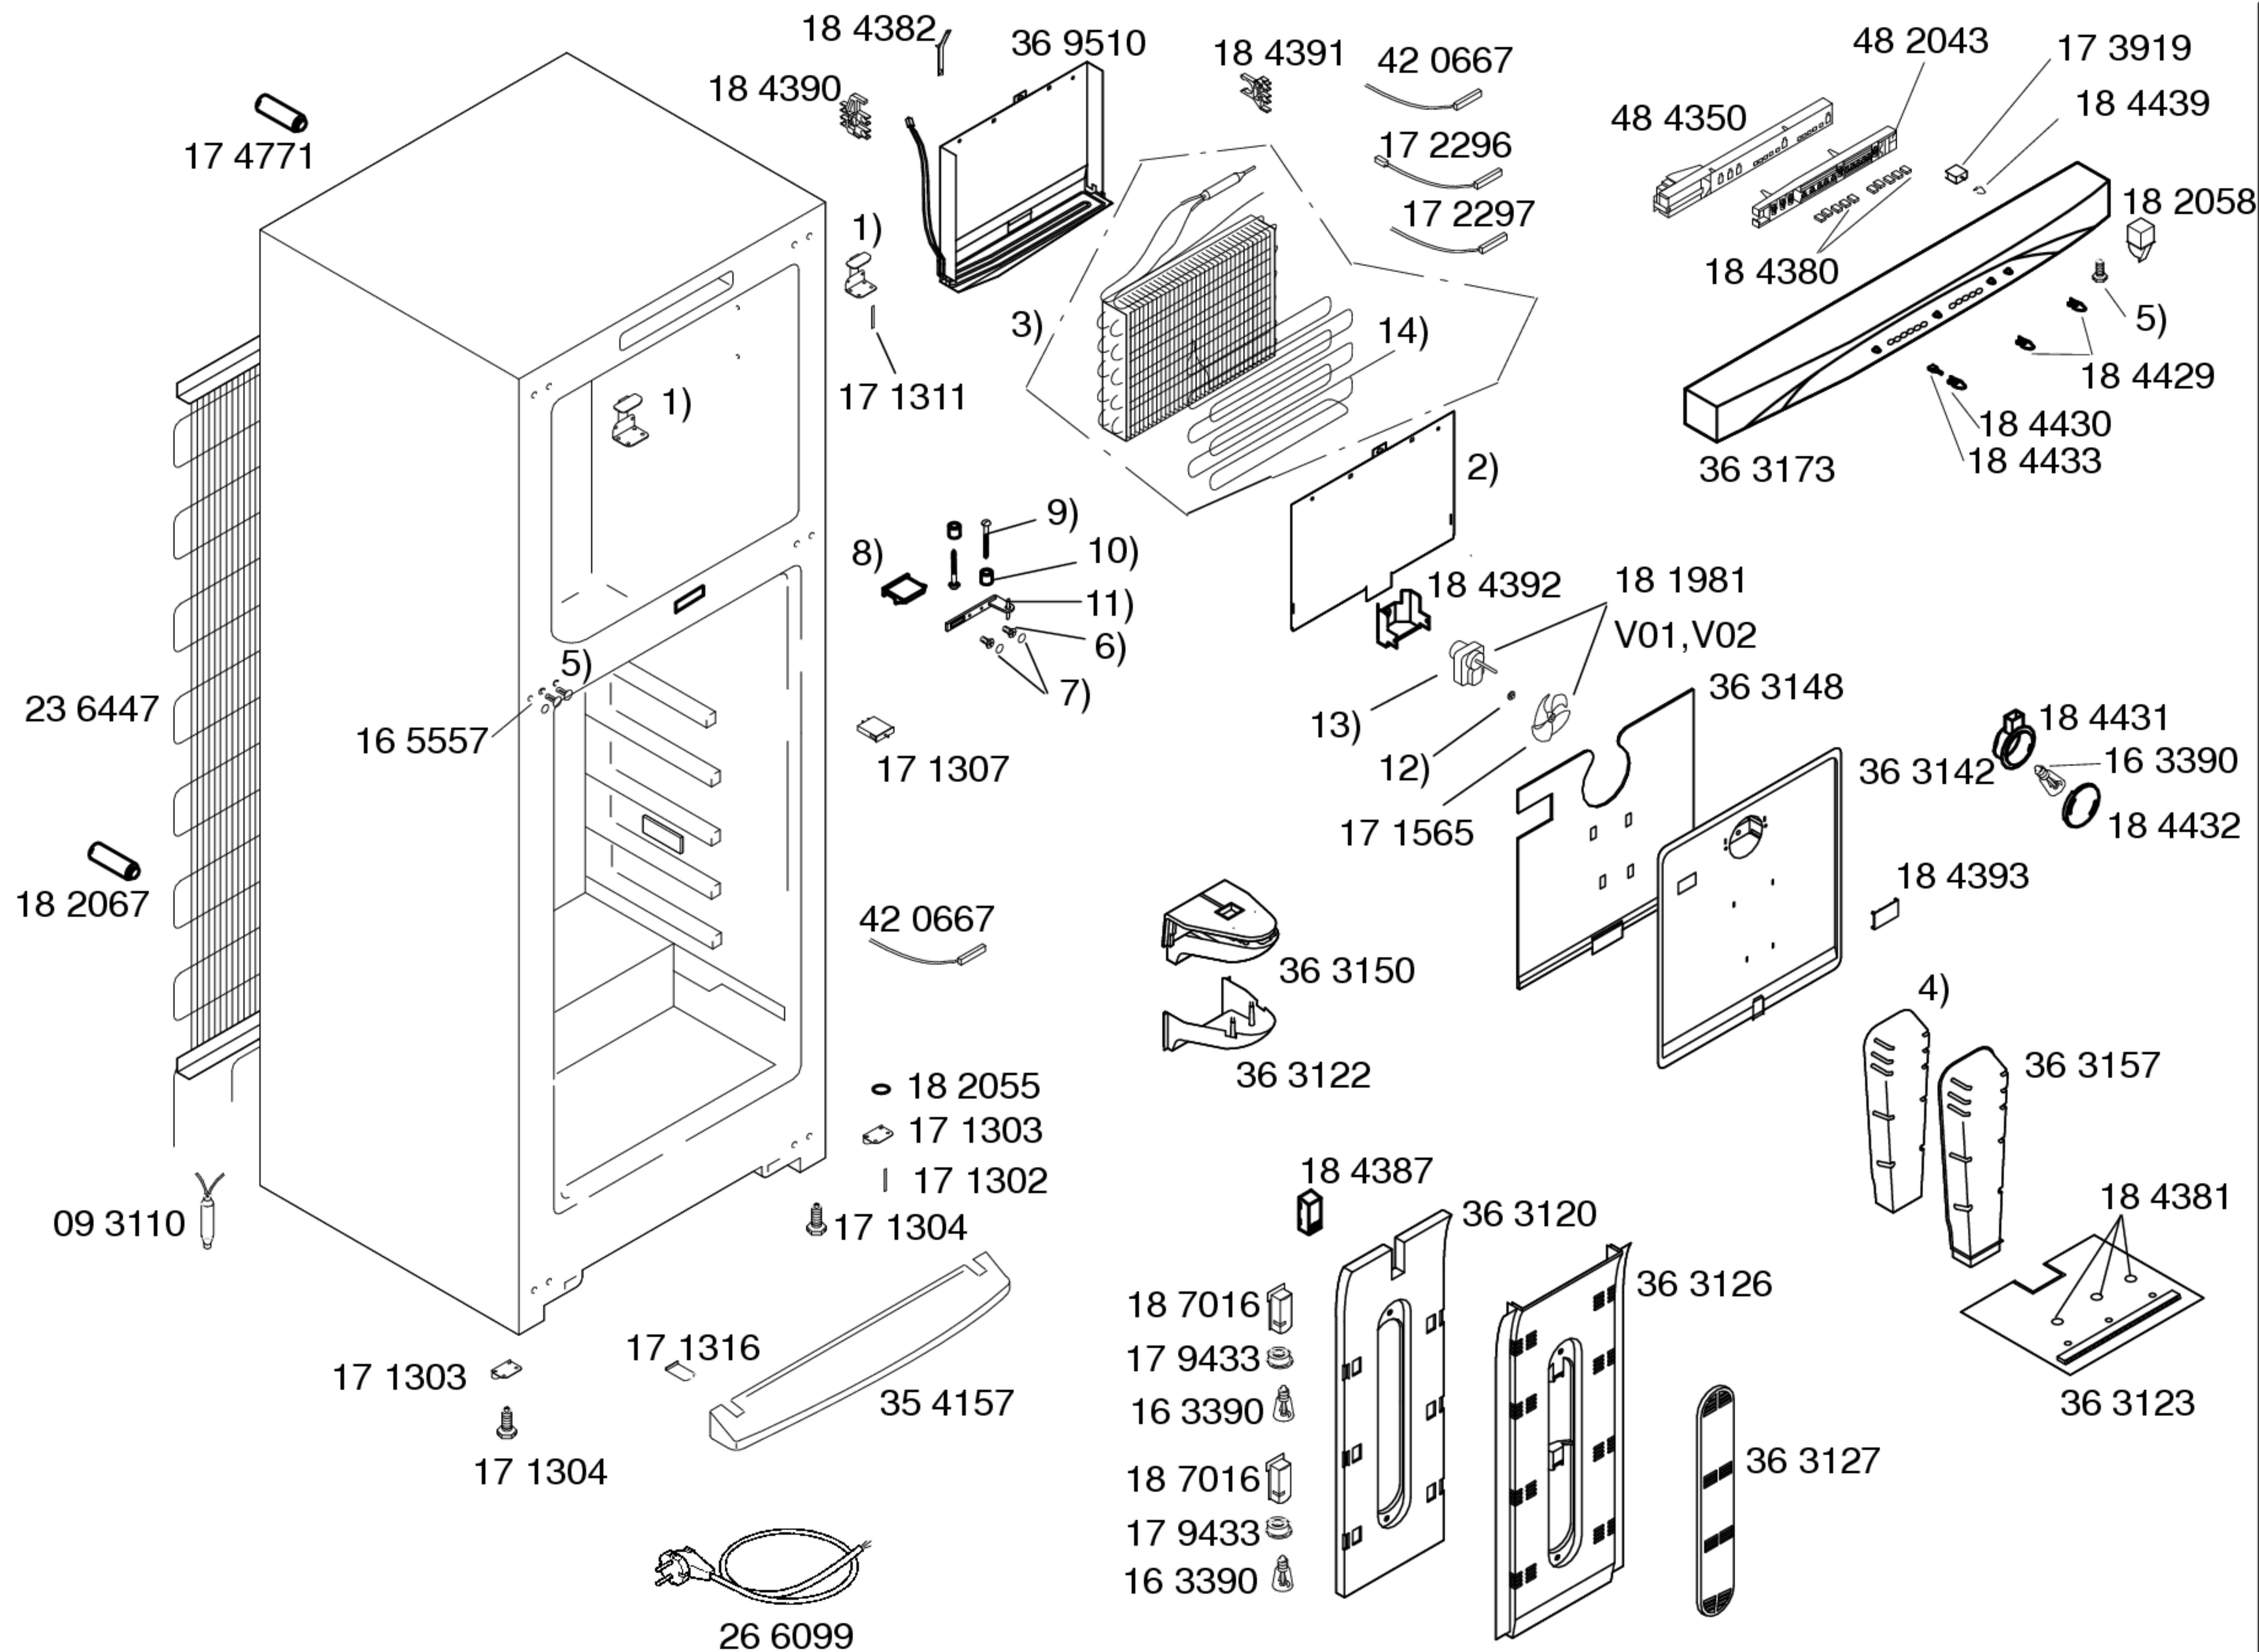

Gebrauchsanweisung
52 9450

- 1) 17 1312
- 2) 36 6904
- 3) 36 3136
V01,V02,V03
36 9818
V04,V05,V06
- 4) 36 6309
- 5) 16 5552
- 6) 18 8196
- 7) 17 6137
- 8) 18 8197
- 9) 18 8194
- 10) 18 8188
- 11) 18 8191
- 12) 17 1508
- 13) 48 8433
V03,V04,V05,V06
- 14) 36 3139
V01,V02,V03
36 9821
V04,V05,V06

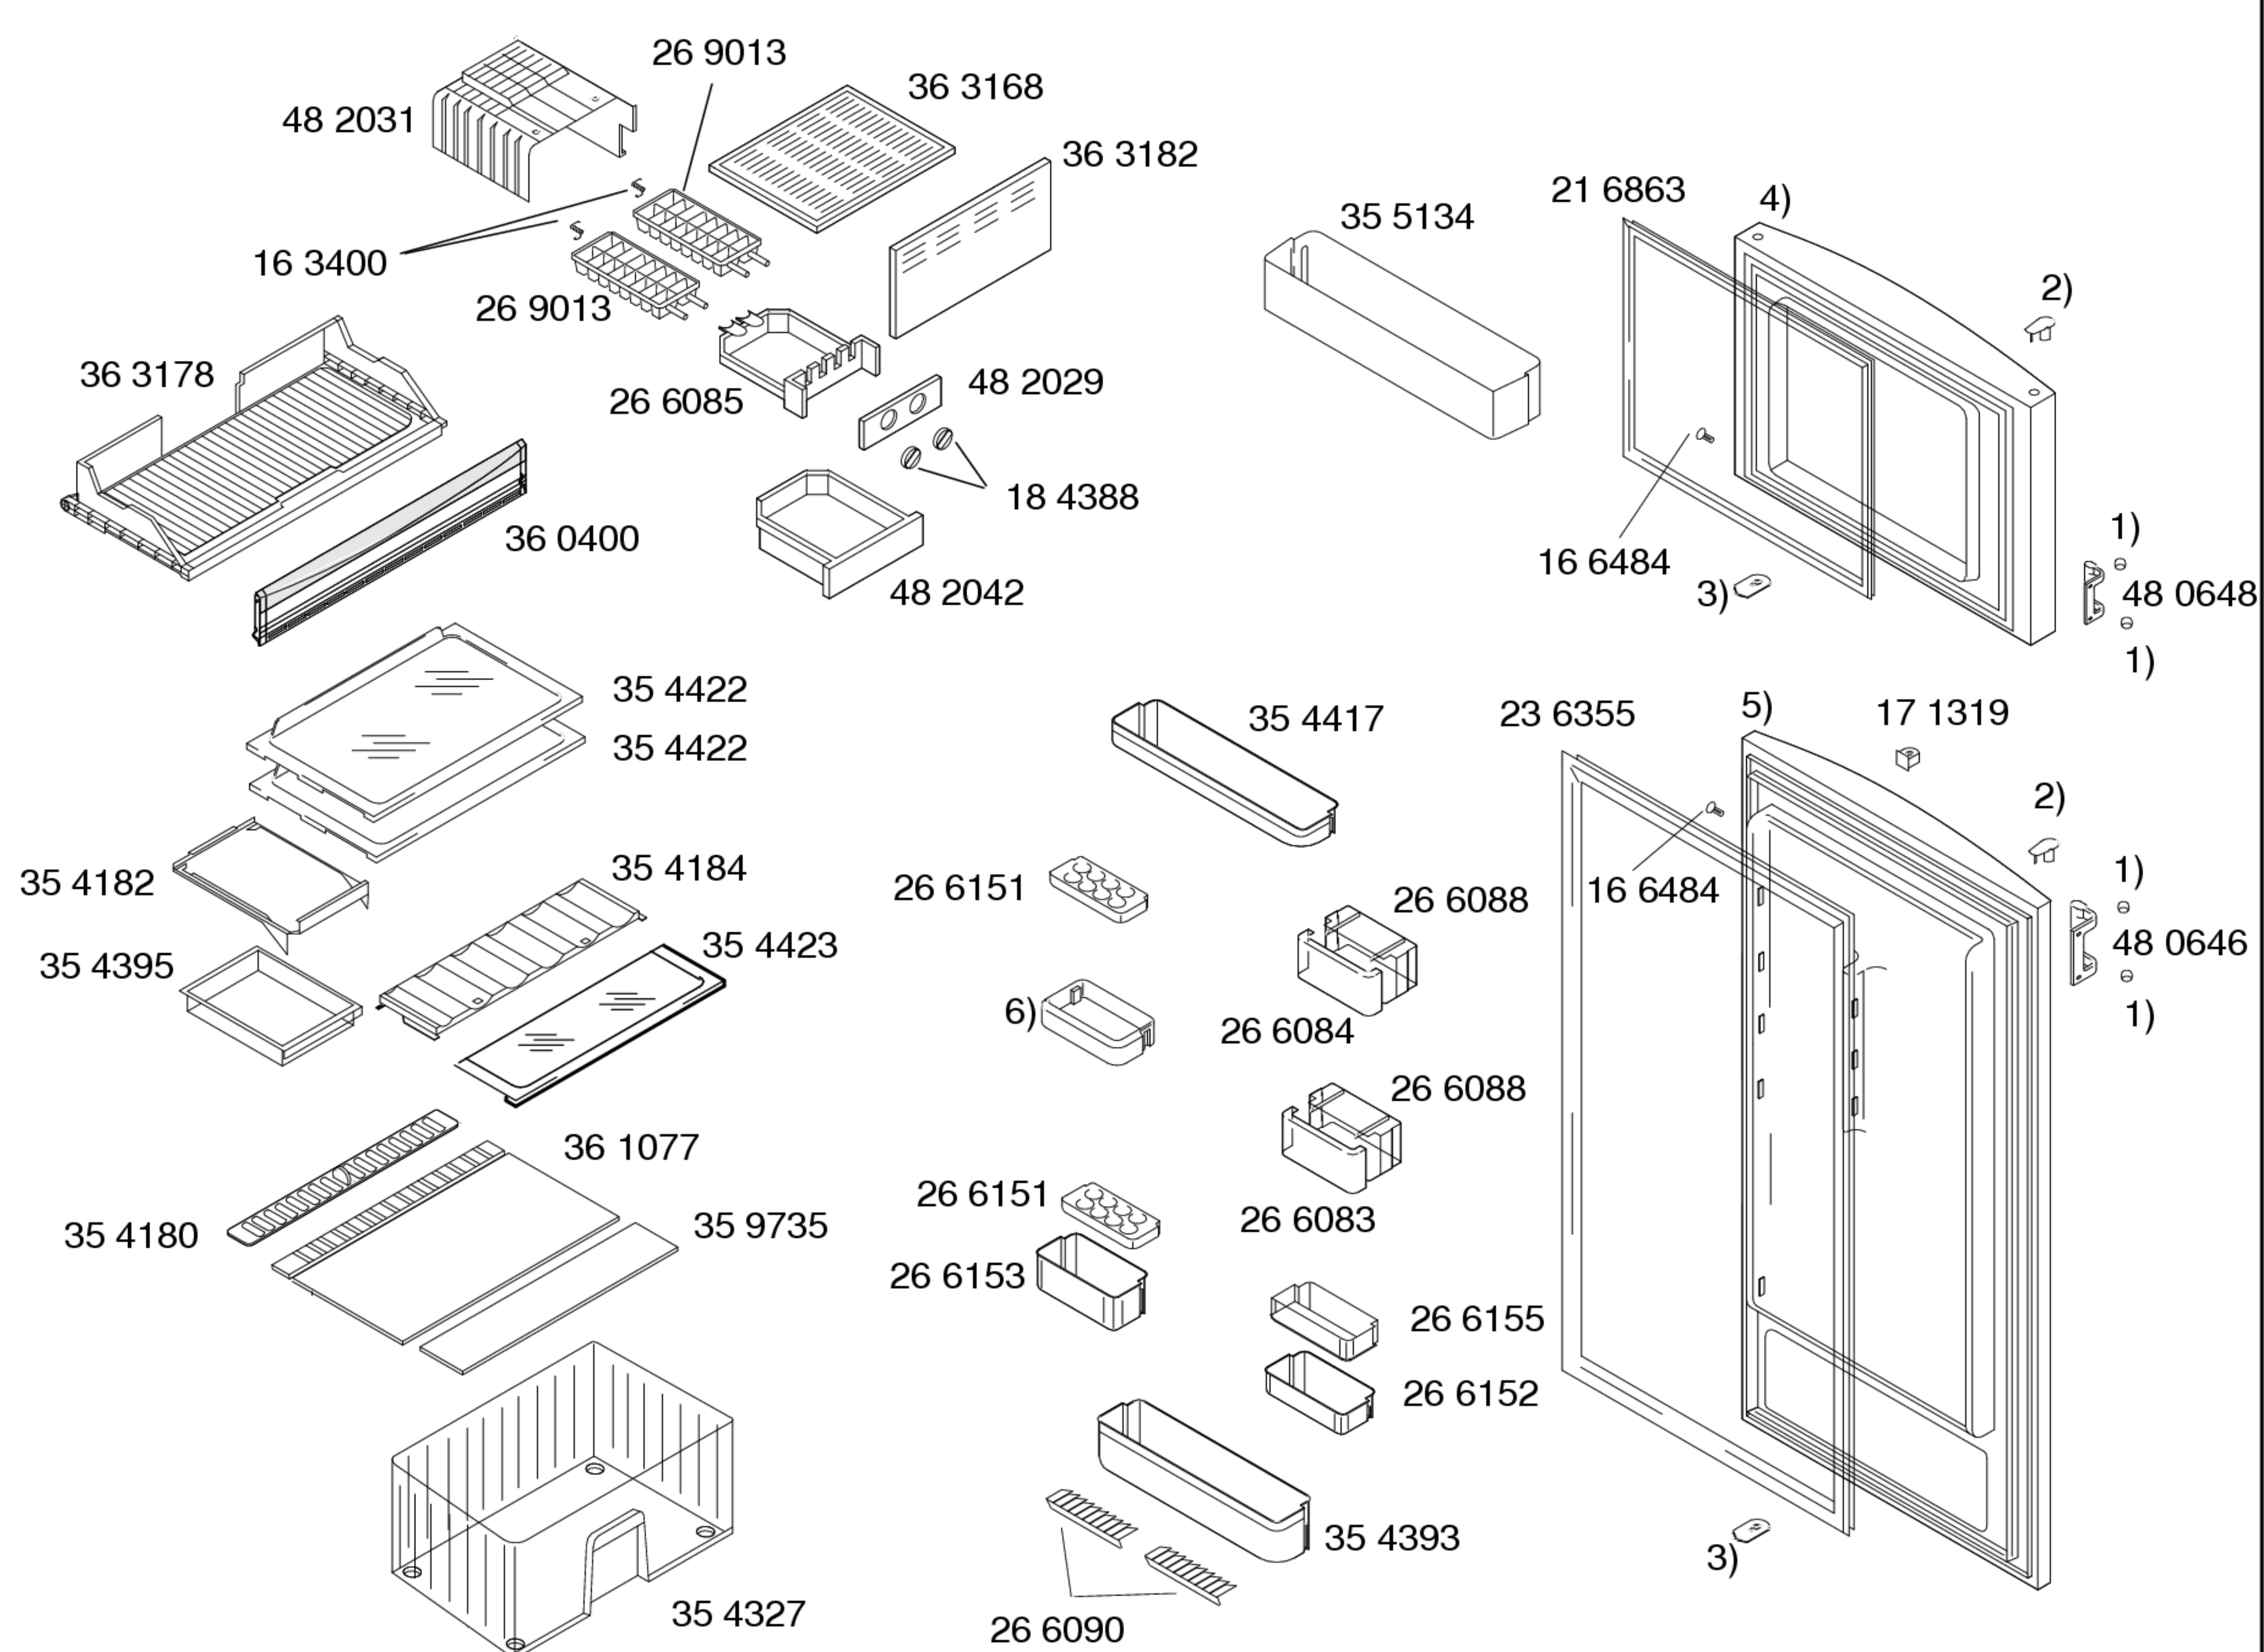

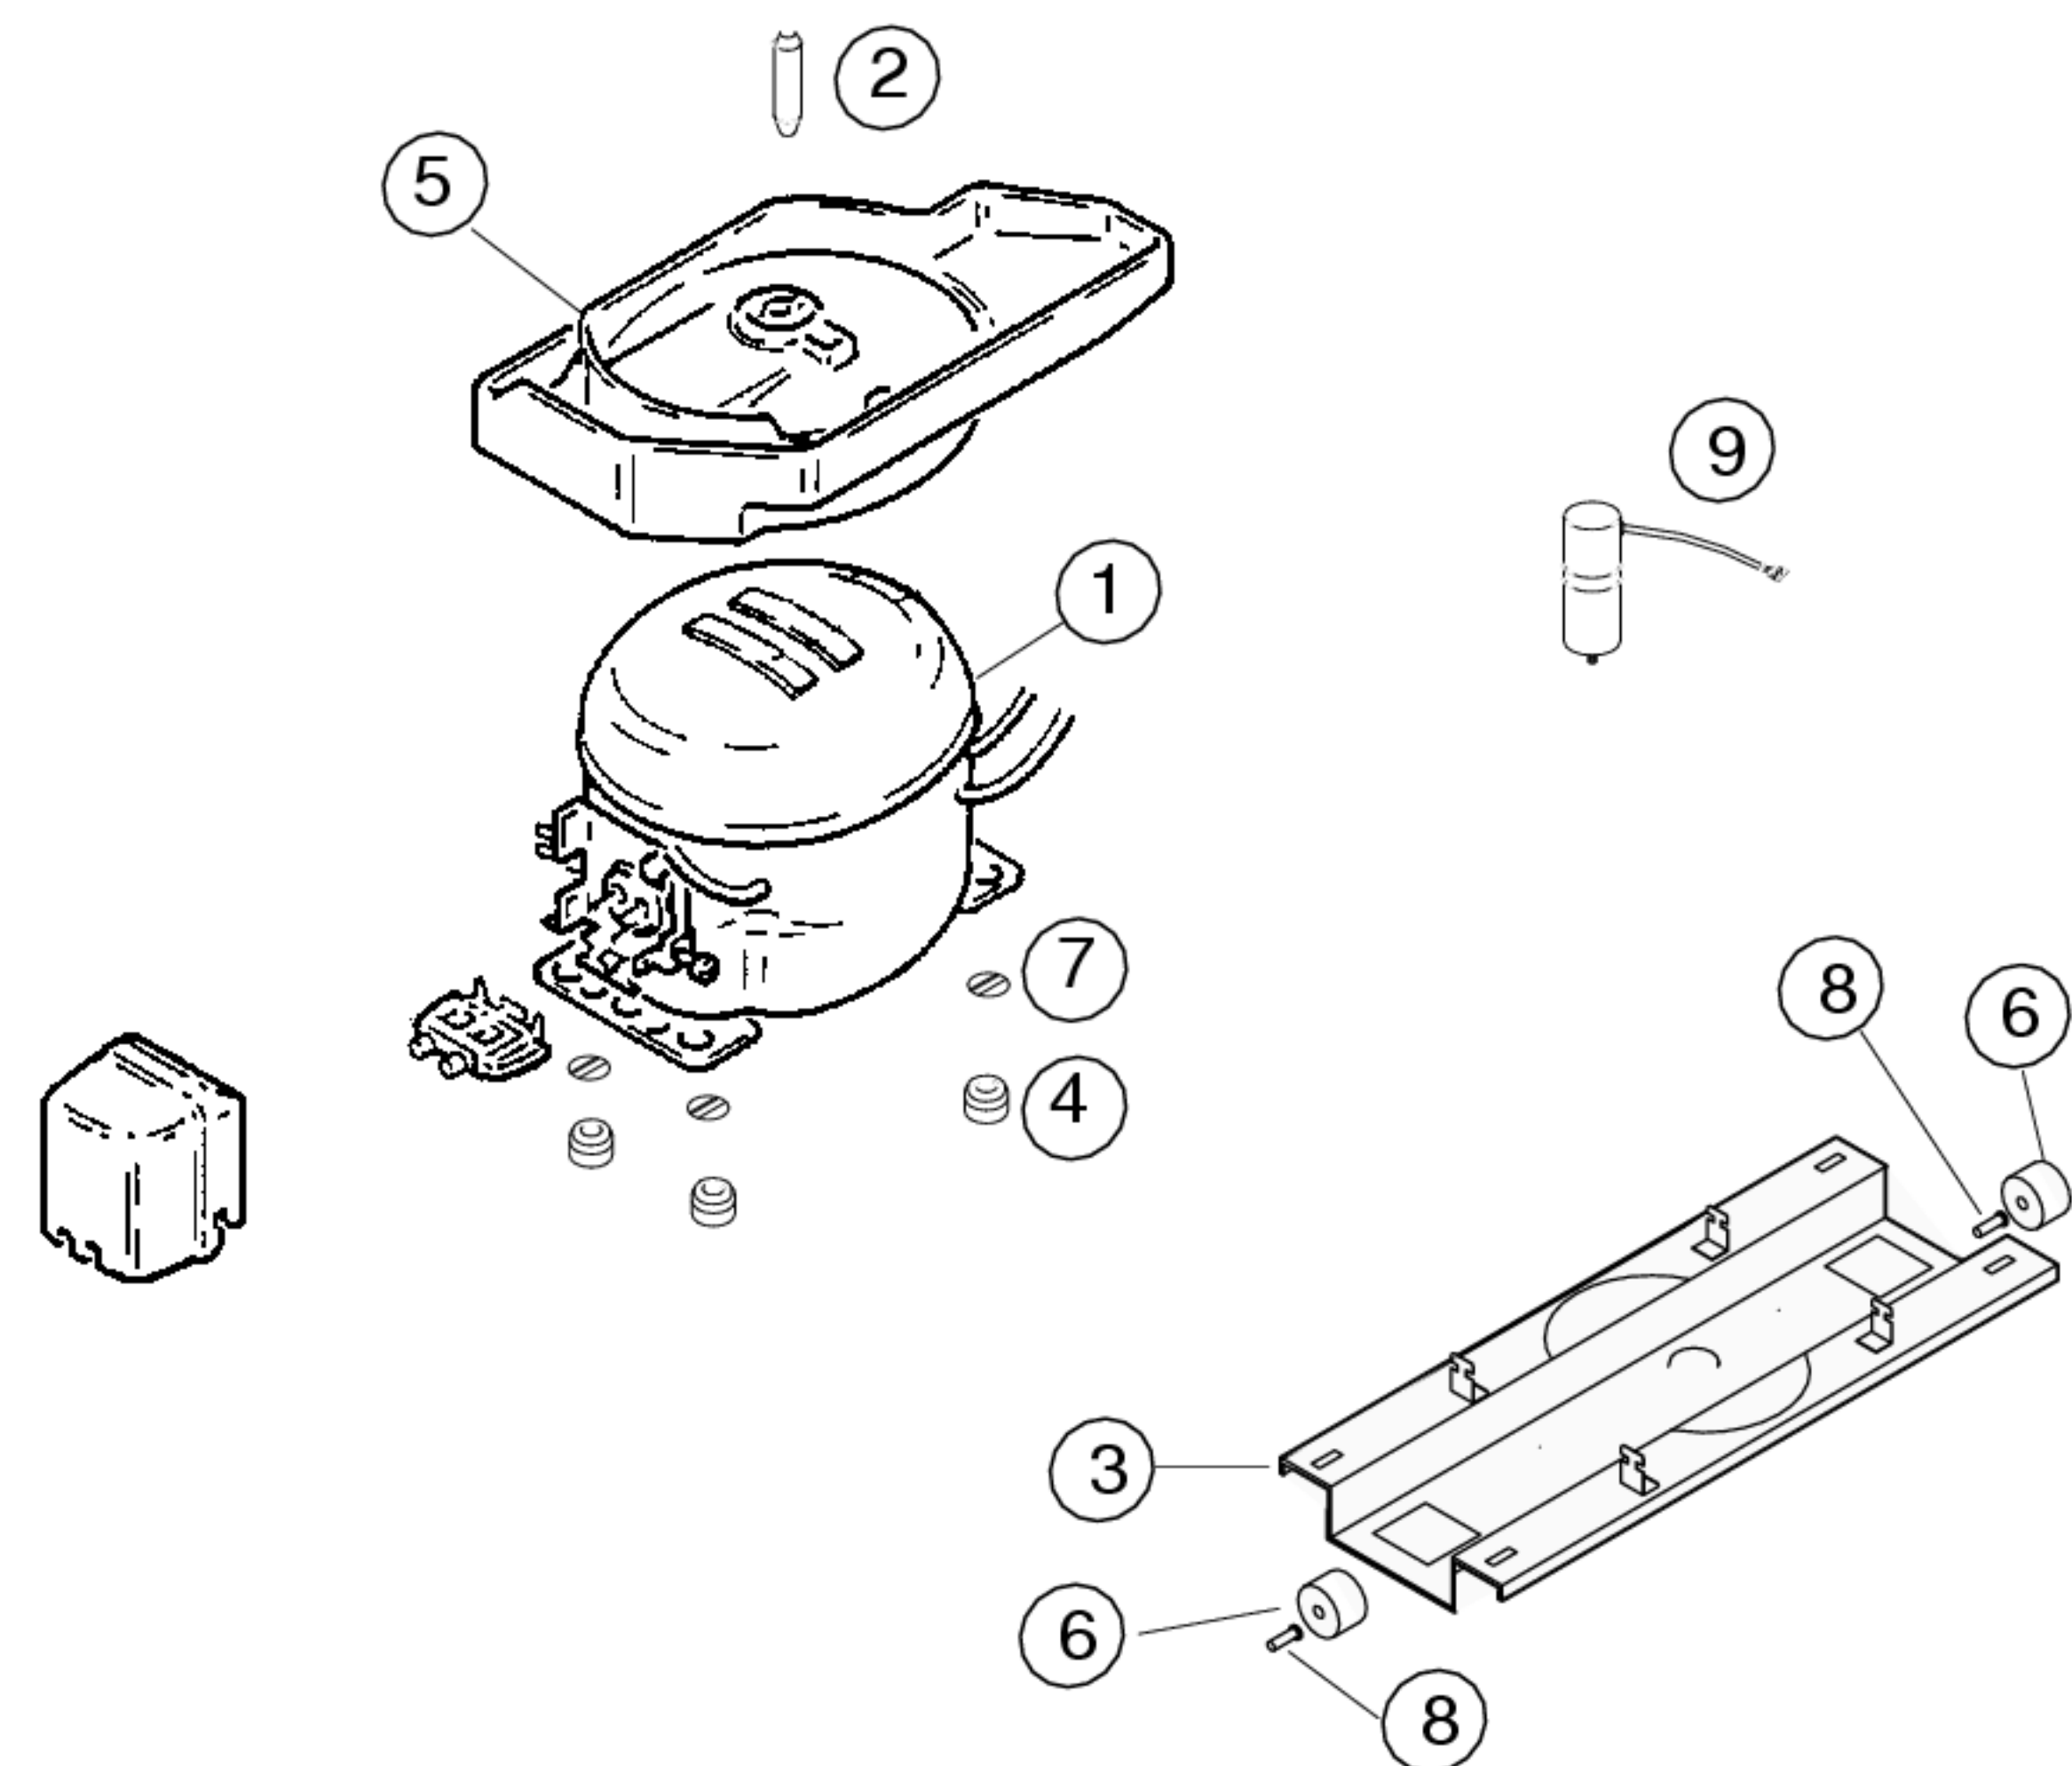

Pos.	V01,2,3,4	V05,6	
	Aspera	Matsushita	
	NBT 1116Y	DA110E	
1	14 2193	14 2303	
2	18 4389		
3	35 4158		
4	16 3427		
5	36 3166	26 5327	
6	17 1318		
7	17 1519		
8	18 1014		
9	17 4093		
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör		Aspera	
Typ/Type/Tip		NBT1116Y	
Förderleistung/Delivery/Verim/h		7	
Anlaufstrom/Starting current/Giris akimi		A	
Widerstand/Resistance/Rezistans Ha/		Ω	
Hi/aux.			
Temp.Reyler/Thermostat/Termostat		Elektronisch	
Typ/Type/Tip			
Reglerstellung/Position/Termostat pozisyonu			
Schaltwerte/Acma kapama degerleri		..ein/acma °C	
Valeurs de commutation/Termostat degeri		..aus"/kapama	
(..abtaven' od)		..alarm'	
Füllmenge/Fill. quantily/ Dolum miktari		R600a	g
		*	
Anschlusswert/Comm. load/Giris gucu		W	160
Heizung/Heater/Rezistans		Verdampfer	Ablaufrinne
Widerstand/Resistance/Direnc		Ω	Klappe
Leistung/Power/Guc (Annehmbare min Werte in 220V)		W	4
		160	48
Ventilador/Blower/Vantilatör		Verdampfer	
Widerstand/Resistance/Rezistans		Ω	
Magnetventil/Magnetic valve/Manyetik valf			
Widerstand/Resistance/Rezistans		Ω	
Spannung/Voltage/Gerilim		V	
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakiniz